

Report No.: 18230SC10043901-M1

Test Report

Client Name : Ecoflow Inc.,

Address : Factory Building A202, Founder Technology Industrial
Park, North side of Songbai Highway, Longteng
Community, Shiyan Sub-district, Baoan District,
Shenzhen City, Guangdong, China

Product Name : R600 Portable Power Station Solar Generator

Date : Jun. 01, 2021

Shenzhen Anbotech Compliance Laboratory Limited**Shenzhen Anbotech Compliance Laboratory Limited**Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

TEST REPORT**IEC 62368-1****Audio/video, information and communication technology equipment****Part 1: Safety requirements**

Report Number : 18230SC10043901-M1

Date of issue : 2021-06-01

Total number of pages : 70 pages

Applicant's name : Ecoflow Inc.,

Address : Factory Building A202, Founder Technology Industrial Park, North side of Songbai Highway, Longteng Community, Shiyan Sub-district, Baoan District, Shenzhen City, Guangdong, China

Test specification:Standard : IEC 62368-1:2014 (Second Edition) and
EN 62368-1:2014 + A11:2017

Test procedure : Type Test

Non-standard test method : N/A

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing Shenzhen Anbotek Compliance Laboratory Limited. The authenticity of this Test Report and its contents can be verified by Shenzhen Anbotek Compliance Laboratory Limited, responsible for this Test Report.

Testing procedure and testing location:**Testing Laboratory:**

Shenzhen Anbotek Compliance Laboratory Limited

Testing location/ address :

1/F, Building D, Sogood Science and Technology Park,
Sanwei community, Hangcheng Street, Bao'an District,
Shenzhen, Guangdong, China.518102

Tested by (name + signature) : Otto Guo

Otto Guo

Approved by (name + signature)....: Smile Tian

*Smile Tian***Shenzhen Anbotek Compliance Laboratory Limited**Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Test Item description	R600 Portable Power Station Solar Generator
Trade Mark	EcoFlow
Manufacturer	Same as applicant
Model/Type reference	EF4, EF4 Max, EF4 Pro
Ratings	<p>Input</p> <p>AC Charge Input Voltage 100-120Vac (50Hz/60Hz) International Version 220-240Vac (50Hz/60Hz)</p> <p>AC Charge Input Power (Example 1) X-STREAM Charge 250W Max 500W Max (With Extra Battery)</p> <p>Solar Charge (Example 2) 200W 10-25V DC 12A max</p> <p>Input Car Charger 12V/24V DC 10A max</p> <p>Output</p> <p>AC Output (x3) / (x2 International Version) Full Sine Wave 600W (Surge 1200W) total, 120Vac (50Hz/60Hz) 230Vac (50Hz/60Hz)</p> <p>USB-A Output (x2) 5V DC, 2.4A, 12W Max, per port</p> <p>USB-A Fast Charge (x1) 5V DC, 9V DC, 12V DC, 2.4A, 18W Max</p> <p>USB-C Output (x1) 5V DC, 9V DC, 12V DC, 15V DC, 20V DC, 5A, 100W Max</p> <p>Car Power Output (x1) 136W, 13.6V DC, 10A Max</p> <p>DC5521 Output (x2) 13.6V DC, 3A Max (per port)</p> <p>Battery:</p> <p>Capacity: DC 28.8V 720Wh</p>

<p>Tests performed (name of test and test clause):</p> <p>The submitted samples were found to comply with the requirements of:</p> <p>Electrical safety</p> <ul style="list-style-type: none"> – IEC 62368-1:2014 – EN 62368-1:2014 + A11:2017 	<p>Testing location:</p> <p>Shenzhen Anbotech Compliance Laboratory Limited</p> <p>1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102</p>
<p>List of countries addressed: EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</p> <p>The product fulfils the requirements of EN 62368-1:2014 + A11:2017</p>	

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline
400-003-0500
www.anbotech.com

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

R600 Portable Power Station Solar Generator
EF4

EcoFlow

Input

AC Charge Input Voltage 100-120Vac (50Hz/60Hz) International Version 220-240Vac (50Hz/60Hz)

AC Charge Input Power (Example 1) X-STREAM Charge 250W Max 500W Max (With Extra Battery)

Solar Charge (Example 2) 200W 10-25V DC 12A max

Input Car Charger 12V/24V DC 10A max

Output

AC Output (x3) / (x2 International Version) Full Sine Wave 600W (Surge 1200W) total, 120Vac (50Hz/60Hz)

230Vac (50Hz/60Hz)

USB-A Output (x2) 5V DC, 2.4A, 12W Max, per port

USB-A Fast Charge (x1) 5V DC, 9V DC, 12V DC, 2.4A, 18W Max

USB-C Output (x1) 5V DC, 9V DC, 12V DC, 15V DC, 20V DC, 5A, 100W Max

Car Power Output (x1) 136W, 13.6V DC, 10A Max

DC5521 Output (x2) 13.6V DC, 3A Max (per port)

Battery:

Capacity: DC 28.8V 720Wh



Ecoflow Inc. ,

Factory Building A202, Founder Technology Industrial Park, North side of Songbai Highway, Longteng Community, Shiyan Sub-district, Baoan District, Shenzhen City, Guangdong, China

Made in China

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

TEST ITEM PARTICULARS:

Classification of use by	<input checked="" type="checkbox"/> Ordinary person <input checked="" type="checkbox"/> Instructed person <input checked="" type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present
Supply Connection.....	<input checked="" type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> + ____ % / - ____ % <input type="checkbox"/> None
Supply Connection – Type	<input checked="" type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input checked="" type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input type="checkbox"/> other:
Considered current rating of protective device as part of building or equipment installation	N/A (Not directly connected to mains) Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility	<input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other:
Class of equipment	<input type="checkbox"/> Class I <input checked="" type="checkbox"/> Class II <input type="checkbox"/> Class III
Access location	<input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient:	40°C
IP protection class	<input checked="" type="checkbox"/> IPX0
Power Systems	<input checked="" type="checkbox"/> TN <input checked="" type="checkbox"/> TT <input type="checkbox"/> IT - ____ V _{L-L}
Altitude during operation (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m
Altitude of test laboratory (m)	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> 500 m
Mass of equipment (kg)	<input checked="" type="checkbox"/> Approx. 0.820 kg
POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object.....	N/A

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
TESTING:	
Date of receipt of test item	2020-09-01
Date (s) of performance of tests	2020-09-01 to 2020-09-09
GENERAL REMARKS:	
<p>“(See Enclosure #)” refers to additional information appended to the report. “(See appended table)” refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> <p>1. Operating Instructions, Ratings Labels and Warnings Labels written in an Accepted or Official Language of the country in question.</p> <p>2. The equipment complies with the National Standards and/or Electrical Codes of the country in question.</p> <p>3. According to the EU directives which have been aligned with EU NLF (new legislative framework), both of manufacturer and importer’s name and address shall be affixed on the product or, where that is not possible, on its packaging or in a document accompanying the product before the product is placed on the EU market.</p> <p>When differences exist; they shall be identified in the General product information section.</p>	
Name and address of factory (ies)	Same as applicant
GENERAL PRODUCT INFORMATION:	
Product Description –	
<p>1. R600 Portable Power Station Solar Generator, models (see model list for details) which designed to supply power for audio, video, information and communication technology, business and office machines, for indoor use only.</p> <p>2. Before placing the products in the different countries, the manufacturer must ensure that: operating instructions, ratings labels and warnings labels are in an accepted or official language of the country in question; the equipment complies with the national standards and/or electrical codes of the country, province or city or in question.</p>	
Model Differences –N/A	
Additional application considerations – (Considerations used to test a component or sub-assembly) –	
<p>- Clearance was evaluated for operating altitude up to 2000m above sea level.</p> <p>- The maximum operating temperature is 40°C.</p> <p>- Add model ML720i-A01 in this report, and Both models are same except model name.</p> <p>- the original report 18230SC00067201 was cancelled.</p> <p>- update address of applicant in this report, and original report 18230SC10043901 was cancelled.</p>	

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:

(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)

(Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.

Electrically-caused injury (Clause 5):

(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)

Example: +5 V dc input

ES1

Source of electrical energy
Corresponding classification (ES)

Input terminal

ES3

USB output terminal

ES1

AC output terminal

ES3

Internal circuits

(Both primary circuits and secondary circuits)

ES3

Electrically-caused fire (Clause 6):

(Note: List sub-assembly or circuit designation and corresponding energy source classification)

Example: Battery pack (maximum 85 watts):

PS2

Source of power or PIS
Corresponding classification (PS)

Input terminal

PS3

Output terminal

PS2

Internal circuits and AC output terminal

(Both primary circuits and secondary circuits)

PS3

Battery

Injury caused by hazardous substances (Clause 7)

(Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.)

Example: Liquid in filled component

Glycol

Source of hazardous substances
Corresponding chemical

Battery

Complied with Annex M

Mechanically-caused injury (Clause 8)

(Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.)

Example: Wall mount unit

MS2

Source of kinetic/mechanical energy
Corresponding classification (MS)

Sharp edges and corners

MS1

Equipment mass

MS1

Thermal burn injury (Clause 9)

(Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.)

Example: Hand-held scanner – thermoplastic enclosure

TS1

Source of thermal energy
Corresponding classification (TS)

External enclosure

TS1

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:


Radiation (Clause 10)

(Note: List the types of radiation present in the product and the corresponding energy source classification.)
Example: DVD – Class 1 Laser Product RS1

Type of radiation	Corresponding classification (RS)
N/A	N/A

ENERGY SOURCE DIAGRAM

Indicate which energy sources are included in the energy source diagram. Insert diagram below

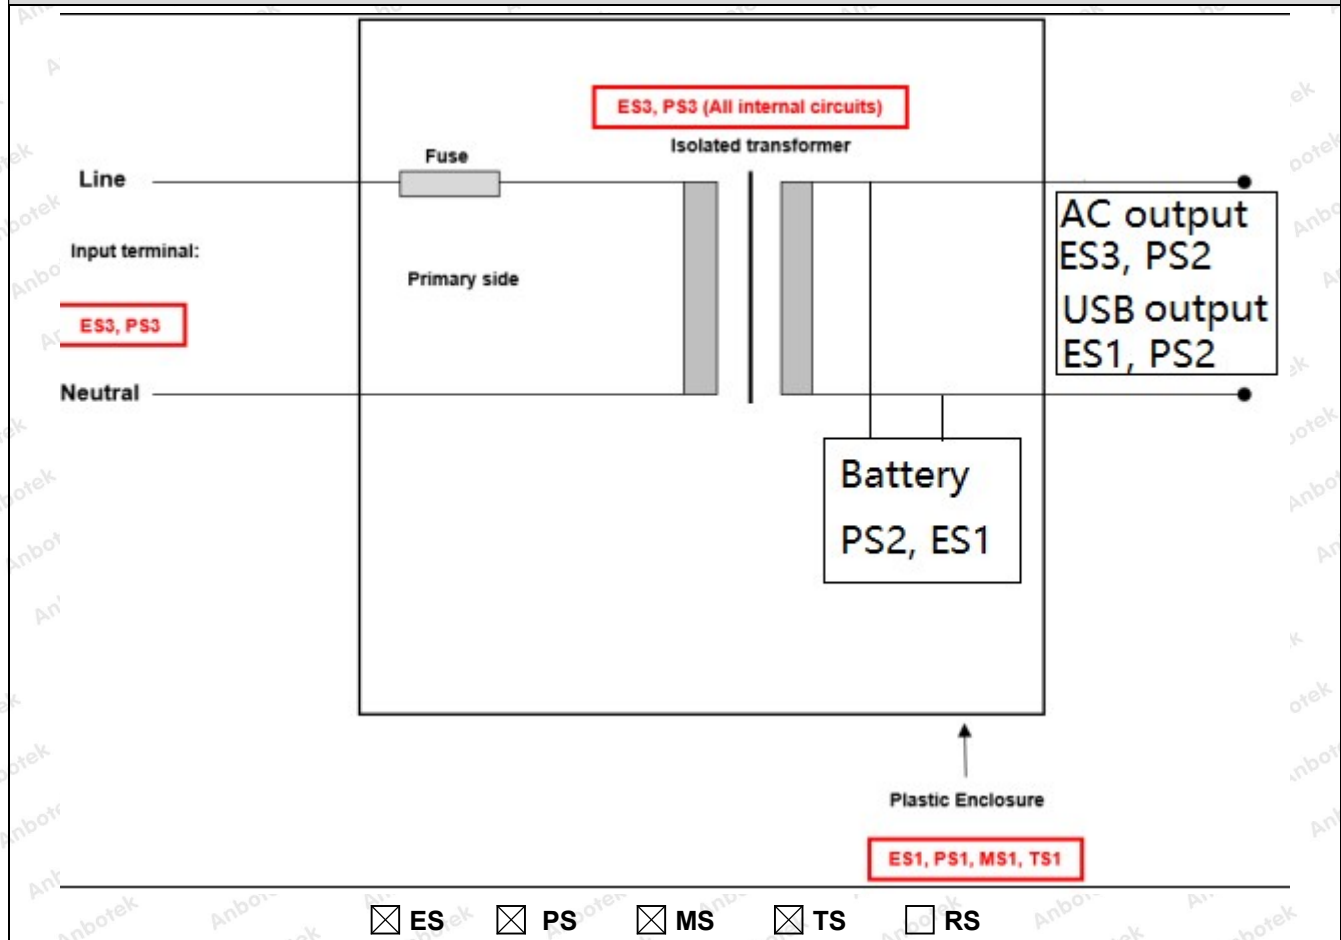

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary person, Instructed person	ES3: Primary circuits (to secondary outputs)	N/A	N/A	Creepage and Clearance, Transformer
Ordinary person, Instructed person	ES3: Primary circuits (to outside accessible enclosure)	N/A	N/A	Creepage and Clearance, Enclosure
Skilled person	ES3: All internal circuits	N/A	N/A	N/A (Skilled safeguard)
Ordinary person, Instructed person, Skilled person	ES1: Output terminal	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
All combustible materials within equipment	PS3: Primary components/circuit	(N) and (A): 1. No ignition occurred; 2. No parts exceeding 90% of its spontaneous ignition temperature	Control fire spread (S): 1. V-0 PCB used; 2. All other components: at least V-2 except for mounted on min. V-1 material or small parts of combustible material; 3. Transformer complied with Annex G.5.3; 4. V-0 enclosure provided.	N/A
All combustible materials for external equipment which connected to output this power supply	PS2: USB Output terminal, And AC output terminal	N/A	N/A	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced

Ordinary person, Skilled person	Battery, Detail see Annex M	N/A	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3: High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Ordinary person, Instructed person, Skilled person	MS1: Sharp edges and corners	N/A	N/A	N/A
Ordinary person, Instructed person, Skilled person	MS1: Equipment mass (<7kg)	N/A	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary person, Instructed person, Skilled person	TS1: External surfaces	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault.				

IEC 62368-1


Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

4	GENERAL REQUIREMENTS		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components	(See appended table 4.1.2)	P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions.....:	(See Annex F)	P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests.....:	(See Annex T.2, T.4)	P
4.4.4.3	Drop tests.....:		N/A
4.4.4.4	Impact tests.....:	(See Annex T.6)	P
4.4.4.5	Internal accessible safeguard enclosure and barrier tests.....:		N/A
4.4.4.6	Glass Impact tests.....:	No glass used	N/A
4.4.4.7	Thermoplastic material tests.....:	(See Annex T.8)	P
4.4.4.8	Air comprising a safeguard.....:	Considered	P
4.4.4.9	Accessibility and safeguard effectiveness	All safeguards remain effective	P
4.5	Explosion		N/A
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to.....:	Internal components	P
4.7	Equipment for direct insertion into mains socket - outlets		N/A
4.7.2	Mains plug part complies with the relevant standard.....:		N/A
4.7.3	Torque (Nm).....:		N/A
4.8	Products containing coin/button cell batteries	No coin/button battery used	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction		N/A
	Means to reduce the possibility of children removing the battery.....:		—
4.8.4	Battery Compartment Mechanical Tests.....:		N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object.....:	No openings	N/A

5	ELECTRICALLY-CAUSED INJURY		P
5.2.1	Electrical energy source classifications.....:	(See appended table 5.2)	P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current..... :	(See appended table 5.2)	P
5.2.2.3	Capacitance limits :	No such capacitor	N/A
5.2.2.4	Single pulse limits :	No single pulse introduced	N/A
5.2.2.5	Limits for repetitive pulses :	No repetitive pulses introduced	N/A
5.2.2.6	Ringing signals :	No means for connection to telephone network and no ringing signal generated	N/A
5.2.2.7	Audio signals :	No audio signal terminals	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements		P
	a) Test with test probe from Annex V :	Checked by V.1.2 (Figure V.1) and V.1.3, cannot contact with the conductive part for ES3 voltage	P
	b) Electric strength test potential (V) :		N/A
	c) Air gap (mm) :	Max. 514V _{peak} , Air gap >0.2mm	P
5.3.2.4	Terminals for connecting stripped wire	No such terminals	N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Humidity conditioning :	Checked by 5.4.8 and then by 5.4.9.1	P
5.4.1.4	Maximum operating temperature for insulating materials :	(See appended table 5.4.1.4)	P
5.4.1.5	Pollution degree :	Pollution degree 2 considered	—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions	No such transformer	N/A
5.4.1.7	Insulation in circuits generating starting pulses	No such circuit	N/A
5.4.1.8	Determination of working voltage		P
5.4.1.9	Insulating surfaces		P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		P
5.4.1.10.2	Vicat softening temperature..... :		N/A
5.4.1.10.3	Ball pressure :	(See appended table 5.4.1.10.3)	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
5.4.2	Clearances		P
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	P
5.4.2.3	Determining clearance using required withstand voltage	(See appended table 5.4.2.3)	P
	a) a.c. mains transient voltage	2500V peak	—
	b) d.c. mains transient voltage	No such transient voltage	—
	c) external circuit transient voltage	No such transient voltage	—
	d) transient voltage determined by measurement:	No need to conduct this test	—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	Determine clearances according to 5.4.2.3 for procedure 2	N/A
5.4.2.5	Multiplication factors for clearances and test voltages	Clearance was evaluated for altitude up to 5000m above sea level, the multiplication factor is 1.48	P
5.4.3	Creepage distances	(See appended table 5.4.3)	P
5.4.3.1	General		P
5.4.3.3	Material Group	Material group IIIa/IIIb is assumed to be used	—
5.4.4	Solid insulation		P
5.4.4.2	Minimum distance through insulation	(See appended table 5.4.4.2)	P
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices	No such component used	N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material	Insulation tape wrapped on outer of T1 used as reinforced insulation	P
5.4.4.6.1	General requirements		P
5.4.4.6.2	Separable thin sheet material		P
	Number of layers (pcs)	Min. 2 layers	P
5.4.4.6.3	Non-separable thin sheet material	No such material used	N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material		N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		P
5.4.4.9	Solid insulation at frequencies >30 kHz	(See appended Table 5.4.4.9)	P
5.4.5	Antenna terminal insulation	No such terminal	P
5.4.5.1	General		P
5.4.5.2	Voltage surge test		P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Insulation resistance (M Ω).....:	Input terminal to USB output terminal : > 2M Ω Input terminal to plastic enclosure with metal foil terminal : > 2M Ω	—
5.4.6	Insulation of internal wire as part of supplementary safeguard	No such insulation	N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		P
	Relative humidity (%).....:	95% RH	—
	Temperature (°C)	40 °C	—
	Duration (h)	120 h	—
5.4.9	Electric strength test	(See appended table 5.4.9)	P
5.4.9.1	Test procedure for a solid insulation type test		P
5.4.9.2	Test procedure for routine tests		P
5.4.10	Protection against transient voltages between external circuit	No transient voltage from external circuit	N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test		N/A
5.4.10.2.3	Steady-state test.....:		N/A
5.4.11	Insulation between external circuits and earthed circuitry	No such external circuit	N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage U _{op} (V).....:		—
	Nominal voltage U _{peak} (V).....:		—
	Max increase due to variation U _{sp}		—
	Max increase due to ageing ΔU_{sa}		—
	U _{op} = U _{peak} + ΔU_{sp} + ΔU_{sa}		—
5.5	Components as safeguards		
5.5.1	General		P
5.5.2	Capacitors and RC units		P
5.5.2.1	General requirement	(See appended table 4.1.2)	P
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector.....:	(See appended table 5.5.2.2)	P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com




Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.3	Transformers	(See Annex G.5.3)	P
5.5.4	Optocouplers	(See sub-clause 5.4 or Annex G.12)	P
5.5.5	Relays	No relays	N/A
5.5.6	Resistors	No such resistors	N/A
5.5.7	SPD's	No SPDs	N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable.....:		N/A
5.6	Protective conductor		N/A
5.6.2	Requirement for protective conductors	Class II equipment	N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm ²)		—
5.6.4	Requirement for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm ²).		—
	Protective current rating (A)		—
5.6.4.3	Current limiting and overcurrent protective devices		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm ²), nominal thread diameter (mm)		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method Resistance (Ω).....:		N/A
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current	Figure 4 and 5 of IEC 60990:1999 used	P
5.7.2.2	Measurement of prospective touch voltage	(See appended table 5.2)	P
5.7.3	Equipment set-up, supply connections and earth connections		P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
400-003-0500
www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	System of interconnected equipment (separate connections/single connection)	Single connection equipment	—
	Multiple connections to mains (one connection at a time/simultaneous connections)	Single connection to mains	—
5.7.4	Earthed conductive accessible parts		P
5.7.5	Protective conductor current		P
	Supply Voltage (V)	264Vac	—
	Measured current (mA)	0.145 mA	—
	Instructional Safeguard		N/A
5.7.6	Prospective touch voltage and touch current due to external circuits	No touch current due to external circuits	N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits	No such external circuits	N/A
	a) Equipment with earthed external circuits Measured current (mA)		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA)		N/A

6	ELECTRICALLY- CAUSED FIRE		P
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications		P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault ... :	(See appended table 6.2.2)	P
6.2.2.3	Power measurement for worst-case power source fault	(See appended table 6.2.2)	P
6.2.2.4	PS1		N/A
6.2.2.5	PS2	(See appended table 6.2.2)	P
6.2.2.6	PS3	All internal circuits are declared as of PS3	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS	(See appended table 6.2.3.1)	P
6.2.3.2	Resistive PIS	(See appended table 6.2.3.2)	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.3.1 (b)	Combustible materials outside fire enclosure		N/A
6.4	Safeguards against fire under single fault conditions		P
6.4.1	Safeguard Method	Method of control fire spread used	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		P
6.4.3.1	General		P
6.4.3.2	Supplementary Safeguards		P
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions..... :	(See appended table 6.4.3)	P
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits	Output terminal complies with Clause 6.6	P
6.4.5.2	Supplementary safeguards :	(See appended tables 4.1.2 and Annex G)	P
6.4.6	Control of fire spread in PS3 circuit	- Parts as in 6.4.5 above; - PCB: V-0 material used; - Fire enclosure provided	P
6.4.7	Separation of combustible materials from a PIS		P
6.4.7.1	General..... :	(See tables 6.2.3.1 and 6.2.3.2)	P
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers	Fire enclosure used	P
6.4.8.1	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure	Enclosure material: V-0	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		N/A
6.4.8.3.1	Fire enclosure and fire barrier openings		N/A
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm)		N/A
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm)		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com


IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Flammability tests for the bottom of a fire enclosure		N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c)		N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating	Plastic enclosure is made of V-0 class material	P
6.5	Internal and external wiring		P
6.5.1	Requirements		P
6.5.2	Cross-sectional area (mm ²)		—
6.5.3	Requirements for interconnection to building wiring		P
6.6	Safeguards against fire due to connection to additional equipment		P
	External port limited to PS2 or complies with Clause Q.1	Output terminal complies with Annex Q.1	P

7	INJURY CAUSED BY HAZARDOUS SUBSTANCES		P
7.2	Reduction of exposure to hazardous substances	No such hazardous substances	N/A
7.3	Ozone exposure	No ozone production	N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010)		—
7.6	Batteries.....	No batteries used	P

8	MECHANICALLY-CAUSED INJURY		P
8.1	General		P
8.2	Mechanical energy source classifications	Sharp edges and corners: MS1 classification; Equipment mass: MS1 classification	P
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		N/A
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts	No moving parts	N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
8.5.2	Instructional Safeguard		—

Shenzhen Anbotek Compliance Laboratory Limited


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks		N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard		—
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N)		N/A
8.5.5	High Pressure Lamps		N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test		N/A
8.6	Stability	MS1 classification	N/A
8.6.1	Product classification		N/A
	Instructional Safeguard		—
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force		—
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt		—
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force)		N/A
	Position of feet or movable parts		—
8.7	Equipment mounted to wall or ceiling	Not wall or ceiling mounted equipment	N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface)		N/A
8.7.2	Direction and applied force		N/A
8.8	Handles strength	No handles used	N/A
8.8.1	Classification		N/A
8.8.2	Applied Force		N/A
8.9	Wheels or casters attachment requirements	No wheels or caster used	N/A
8.9.1	Classification		N/A
8.9.2	Applied force		—

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
 www.anbotek.com


IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.10	Carts, stands and similar carriers	No carts, stands and similar carriers used	N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard		—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force		—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N)		—
8.10.6	Thermoplastic temperature stability (°C)		N/A
8.11	Mounting means for rack mounted equipment	Not such equipment	N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable N		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas	No antennas	N/A
	Button/Ball diameter (mm)		—

9	THERMAL BURN INJURY		P
9.2	Thermal energy source classifications	External enclosure: TS1	P
9.3	Safeguard against thermal energy sources		P
9.4	Requirements for safeguards		N/A
9.4.1	Equipment safeguard		N/A
9.4.2	Instructional safeguard		N/A

10	RADIATION		N/A
10.2	Radiation energy source classification		N/A
10.2.1	General classification		N/A
10.3	Protection against laser radiation	No laser radiation	N/A
	Laser radiation that exists equipment:		—
	Normal, abnormal, single-fault		N/A
	Instructional safeguard		—
	Tool		—
10.4	Protection against visible, infrared, and UV radiation	No visible, infrared, and UV radiation	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.4.1	General		N/A
10.4.1.a)	RS3 for Ordinary and instructed persons		N/A
10.4.1.b)	RS3 accessible to a skilled person.....		N/A
	Personal safeguard (PPE) instructional safeguard		—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 ..		N/A
10.4.1.d)	Normal, abnormal, single-fault conditions		N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque.....		N/A
10.4.1.f)	UV attenuation		N/A
10.4.1.g)	Materials resistant to degradation UV		N/A
10.4.1.h)	Enclosure containment of optical radiation.....		N/A
10.4.1.i)	Exempt Group under normal operating conditions.....		N/A
10.4.2	Instructional safeguard		N/A
10.5	Protection against x-radiation	No x-radiation	N/A
10.5.1	X- radiation energy source that exists equipment:		N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards.....		N/A
	Instructional safeguard for skilled person		N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation		—
	Abnormal and single-fault condition		N/A
	Maximum radiation (pA/kg).....		N/A
10.6	Protection against acoustic energy sources	No acoustic energy sources	N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A).....		N/A
	Output voltage, unweighted r.m.s.....		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards		N/A
	Equipment safeguard prevent ordinary person to RS2		—
	Means to actively inform user of increase sound pressure.....		—
	Equipment safeguard prevent ordinary person to RS2		—
10.6.5	Requirements for listening devices (headphones,		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	earphones, etc.)		
10.6.5.1	Corded passive listening devices with analog input		N/A
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output..... :		—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A)..... :		—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A)..... :		—

B	NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS		P
B.2	Normal Operating Conditions		P
B.2.1	General requirements..... :	(See summary of testing & appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers	No audio amplifier circuits	N/A
B.2.3	Supply voltage and tolerances		P
B.2.5	Input test..... :	(See appended table B.2.5)	P
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements..... :		P
B.3.2	Covering of ventilation openings	No ventilation openings	N/A
B.3.3	D.C. mains polarity test	A.C. mains supply only	N/A
B.3.4	Setting of voltage selector	No such voltage selector	N/A
B.3.5	Maximum load at output terminals	(See appended table B.3)	P
B.3.6	Reverse battery polarity	No batteries used	N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.	No audio amplifiers	N/A
B.3.8	Safeguards functional during and after abnormal operating conditions	During an abnormal operating condition that does not lead to a single fault condition, all safeguards are remained effective. After restoration of normal operating conditions, all safeguards are compliance with applicable requirements	P
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited	No such controlling device	N/A
B.4.3	Motor tests		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature	No motors used	N/A
B.4.4	Short circuit of functional insulation		P
B.4.4.1	Short circuit of clearances for functional insulation	(See appended table B.4)	P
B.4.4.2	Short circuit of creepage distances for functional insulation	(See appended table B.4)	P
B.4.4.3	Short circuit of functional insulation on coated printed boards	No coated printed boards	N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors	(See appended table B.4)	P
B.4.6	Short circuit or disconnect of passive components	(See appended table B.4)	P
B.4.7	Continuous operation of components	Not intermittent or short-time operation equipment	N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		P
B.4.9	Battery charging under single fault conditions ...		P


C	UV RADIATION	N/A
C.1	Protection of materials in equipment from UV radiation	No UV radiation within the EUT
C.1.2	Requirements	N/A
C.1.3	Test method	N/A
C.2	UV light conditioning test	N/A
C.2.1	Test apparatus	N/A
C.2.2	Mounting of test samples	N/A
C.2.3	Carbon-arc light-exposure apparatus	N/A
C.2.4	Xenon-arc light exposure apparatus	N/A

D	TEST GENERATORS	N/A
D.1	Impulse test generators	N/A
D.2	Antenna interface test generator	N/A
D.3	Electronic pulse generator	N/A

E	TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS	N/A
E.1	Audio amplifier normal operating conditions	No audio amplifier
	Audio signal voltage (V)	—
	Rated load impedance (Ω)	
E.2	Audio amplifier abnormal operating conditions	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

F	EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS		P
F.1	General requirements		P
	Instructions – Language	English checked	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	Located on the external enclosure surface	P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification	See copy of marking plate	—
F.3.2.2	Model identification	See copy of marking plate and model list	—
F.3.3	Equipment rating markings		P
F.3.3.1	Equipment with direct connection to mains		P
F.3.3.2	Equipment without direct connection to mains		N/A
F.3.3.3	Nature of supply voltage.....	See label	—
F.3.3.4	Rated voltage	See label	—
F.3.3.4	Rated frequency	See label	—
F.3.3.6	Rated current or rated power	See label	—
F.3.3.7	Equipment with multiple supply connections	Single supply connection	N/A
F.3.4	Voltage setting device	No such device	N/A
F.3.5	Terminals and operating devices		P
F.3.5.1	Mains appliance outlet and socket-outlet markings	230Vac, 50Hz, 55W Max.	P
F.3.5.2	Switch position identification marking	No switch used	N/A
F.3.5.3	Replacement fuse identification and rating markings		N/A
F.3.5.4	Replacement battery identification marking	No replacement battery	N/A
F.3.5.5	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I Equipment		P
F.3.6.1.1	Protective earthing conductor terminal		P
F.3.6.1.2	Neutral conductor terminal		P
F.3.6.1.3	Protective bonding conductor terminals		P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com




Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.6.2	Class II equipment (IEC60417-5172)		N/A
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking	IP20, no marking is needed	—
F.3.8	External power supply output marking	See copy of marking plate	P
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings		P
F.4	Instructions		P
	a) Equipment for use in locations where children not likely to be present - marking		P
	b) Instructions given for installation or initial use		P
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		P
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		P
	Where “instructional safeguard” is referenced in the test report it specifies the required elements, location of marking and/or instruction		P

G	COMPONENTS		P
G.1	Switches		N/A
G.1.1	General requirements	No switches used	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.2	Relays		N/A
G.2.1	General requirements	No relays used	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.4	Mains relay, modified as stated in G.2		N/A
G.3	Protection Devices		P
G.3.1	Thermal cut-offs	No thermal cut-offs used	N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691	No thermal links used	N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H)		—
	Single Fault Condition		—
	Test Voltage (V) and Insulation Resistance (Ω) ..		—
G.3.3	PTC Thermistors	No PTC thermistor used	N/A
G.3.4	Overcurrent protection devices	Approved current fuse provided	N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		P
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions.....	(See appended Table B.4)	P
G.4	Connectors		P
G.4.1	Spacings		N/A
G.4.2	Mains connector configuration	AC inlet used for all models are within their ratings considered acceptable without further evaluation	P
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely	The output connector is such a shape that cannot insertion into a mains socket-outlet	P
G.5	Wound Components		P
G.5.1	Wire insulation in wound components.....	Approved source of triple insulated wire used as secondary winding for reinforced insulation	P
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°	Separated by insulation tube	P
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Time (s)		—
	Temperature (°C)		—
G.5.2.3	Wound Components supplied by mains		N/A
G.5.3	Transformers		P
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1).....	Comply with the requirements as below	N/A
	Position	T1	—
	Method of protection	See G.5.3.3	—
G.5.3.2	Insulation		P
	Protection from displacement of windings.....	Fixed by bobbin and insulation tape	—
G.5.3.3	Overload test	(See append table B.3)	P
G.5.3.3.1	Test conditions		P
G.5.3.3.2	Winding Temperatures testing in the unit		P
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements	No motors used	N/A
	Position		—
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days)		—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V)		—
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature		N/A
	Electric strength test (V)		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h)		N/A
	Electric strength test (V)		N/A
G.5.4.7	Motors with capacitors		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage		—
G.6	Wire Insulation		P
G.6.1	General	Approved source of triple insulated wire used as secondary winding for reinforced insulation	P
G.6.2	Solvent-based enamel wiring insulation		N/A
G.7	Mains supply cords		N/A
G.7.1	General requirements	No mains supply cords provided	N/A
	Type.....		—
	Rated current (A).....		—
	Cross-sectional area (mm ²), (AWG).....		—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N)		—
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm)....		—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g)		—
	Diameter (m)		—
	Temperature (°C)		—
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	Varistors		N/A
G.8.1	General requirements		N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com




Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.8.3.3	Temporary overvoltage		N/A
G.9	Integrated Circuit (IC) Current Limiters		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.		N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA		—
G.9.1 d)	IC limiter output current (max. 5A)		—
G.9.1 e)	Manufacturers' defined drift		—
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	Resistors		N/A
G.10.1	General requirements	No such resistors used	N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	Capacitor and RC units		P
G.11.1	General requirements		P
G.11.2	Conditioning of capacitors and RC units		P
G.11.3	Rules for selecting capacitors		P
G.12	Optocouplers		P
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results).....		P
	Type test voltage Vini		—
	Routine test voltage, Vini,b		—
G.13	Printed boards		P
G.13.1	General requirements	(See appended table 4.1.2)	P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards	No coated printed boards used	N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
	Compliance with cemented joint requirements (Specify construction).....		—

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs)		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	Coating on components terminals		N/A
G.14.1	Requirements	(See G.13)	N/A
G.15	Liquid filled components		N/A
G.15.1	General requirements		N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	IC including capacitor discharge function (ICX)		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours	No such IC used	N/A
b)	Impulse test using circuit 2 with $U_c =$ to transient voltage		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage		—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance		—
D3)	Resistance		—

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

H	CRITERIA FOR TELEPHONE RINGING SIGNALS		N/A
H.1	General	No telephone ringing signals produce	N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz)		—
H.3.1.2	Voltage (V)		—
H.3.1.3	Cadence; time (s) and voltage (V)		—
H.3.1.4	Single fault current (mA):.....		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V)		—

J	INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION		P
	General requirements	Approved triple insulated wires complied with Annex U of IEC60950-1 (It can be considered comply with Annex J of this standard)	P

K	SAFETY INTERLOCKS		N/A
K.1	General requirements	No safety interlocks inside the EUT	N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location)		N/A
K.7.2	Overload test, Current (A)		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com


IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
K.7.3	Endurance test		N/A
K.7.4	Electric strength test		N/A

L	DISCONNECT DEVICES		P
L.1	General requirements	The AC inlet used as disconnect device	P
L.2	Permanently connected equipment	Not such equipment	N/A
L.3	Parts that remain energized	No parts remain energized after the mains plug disconnected	N/A
L.4	Single phase equipment	The AC inlet disconnect both poles simultaneously	P
L.5	Three-phase equipment	Single phase equipment	N/A
L.6	Switches as disconnect devices	No switches used as disconnect devices	N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources	Single power source	N/A

M	EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS		P
M.1	General requirements		P
M.2	Safety of batteries and their cells		P
M.2.1	Requirements		P
M.2.2	Compliance and test method (identify method) ... :		P
M.3	Protection circuits		P
M.3.1	Requirements		P
M.3.2	Tests		P
	- Overcharging of a rechargeable battery		P
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		P
	- Excessive discharging rate for any battery		P
M.3.3	Compliance		P
M.4	Additional safeguards for equipment containing secondary lithium battery		P
M.4.1	General		P
M.4.2	Charging safeguards		P
M.4.2.1	Charging operating limits		P
M.4.2.2a)	Charging voltage, current and temperature	See table M.4	—
M.4.2.2 b)	Single faults in charging circuitry		—

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
400-003-0500
www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		P
M.4.4.2	Preparation		P
M.4.4.3	Drop and charge/discharge function tests		P
	Drop	1000mm, 3times	P
	Charge	Charge function effective	P
	Discharge	Discharge function effective	P
M.4.4.4	Charge-discharge cycle test	Three complete discharge and charge cycles.	P
M.4.4.5	Result of charge-discharge cycle test	Charge/discharge function effective	P
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		P
M.6.1	Short circuits		P
M.6.1.1	General requirements		P
M.6.1.2	Test method to simulate an internal fault		P
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method)	Internal short test was conducted in IEC 62133 report of built-in battery cell	P
M.6.2	Leakage current (mA)		N/A
M.7	Risk of explosion from lead acid and NiCd batteries		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume V_z (m ³ /s).....		—
M.8.2.3	Correction factors.....		—
M.8.2.4	Calculation of distance d (mm)		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing)	Similar statement mentioned in the instructions	P

N	ELECTROCHEMICAL POTENTIALS	N/A
	Metal(s) used	—

O	MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES	P
	Figures O.1 to O.20 of this Annex applied	Considered

P	SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS	P
P.1	General requirements	P
P.2.2	Safeguards against entry of foreign object	P
	Location and Dimensions (mm)	No openings
P.2.3	Safeguard against the consequences of entry of foreign object	N/A
P.2.3.1	Safeguards against the entry of a foreign object	N/A
	Openings in transportable equipment	N/A
	Transportable equipment with metalized plastic parts	N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard)	N/A
P.3	Safeguards against spillage of internal liquids	No internal liquids
P.3.1	General requirements	N/A
P.3.2	Determination of spillage consequences	N/A
P.3.3	Spillage safeguards	N/A
P.3.4	Safeguards effectiveness	N/A
P.4	Metallized coatings and adhesive securing parts	No such coatings and securing parts
P.4.2 a)	Conditioning testing	N/A
	Tc (°C)	—
	Tr (°C)	—
	Ta (°C)	—
P.4.2 b)	Abrasion testing	N/A
P.4.2 c)	Mechanical strength testing	N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------


Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		P
Q.1	Limited power sources	For output terminal (see Table Q.1)	P
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		P
	- Regulating network limited output under normal operating and simulated single fault condition	(See appended table Annex Q.1)	P
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method	(See appended table Annex Q.1)	P
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A)		—
	Current limiting method		—

R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A).		N/A

S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material		—
	Wall thickness (mm)		—
	Conditioning (°C)		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material		—
	Wall thickness (mm)		—

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com


IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Conditioning (°C).....:		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material		—
	Wall thickness (mm).....:		—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material		—
	Wall thickness (mm).....:		—
	Conditioning (test condition), (°C).....:		—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A

T	MECHANICAL STRENGTH TESTS		P
T.1	General requirements		P
T.2	Steady force test, 10 N	(See appended table T.2)	P
T.3	Steady force test, 30 N		N/A
T.4	Steady force test, 100 N	(See appended table T.4)	P
T.5	Steady force test, 250 N		N/A
T.6	Enclosure impact test		P
	Fall test		P
	Swing test		N/A
T.7	Drop test		N/A
T.8	Stress relief test	(See appended table T.8)	P
T.9	Impact Test (glass)	No glass used	N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

IEC 62368-1

Clause	Requirement + Test	Result - Remark	Verdict
	Impact energy (J).....:		—
	Height (m)		—
T.10	Glass fragmentation test	No glass used	N/A
T.11	Test for telescoping or rod antennas	No telescoping or rod antennas used	N/A
	Torque value (Nm)		—

U	MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION		N/A
U.1	General requirements	No CRTs	N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen.....:		N/A

V	DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)		P
V.1	Accessible parts of equipment		P
V.2	Accessible part criterion		P

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

4.1.2	TABLE: List of critical components				P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹
Plastic enclosure	SABIC INNOVATIVE PLASTICS B V	940(f1)	V-0, 120°C, min. 1.5 mm thickness.	UL 94, UL 746C	UL
Plug holder	SABIC INNOVATIVE PLASTICS B V	940(f1)	V-0, 120°C	UL 94, UL 746C	UL
PCB	GUANG DONG HONG TAI ELECTRONIC INC CO LTD	HH-1, HH-2	V-0, 130°C	UL 796, UL 94	UL
(Alternative)	MEIZHOU HUADA CIRCUIT BOARD CO LTD	HD-D	V-0, 130°C	UL 796, UL 94	UL
(Alternative)	DONGGUAN YE JIU GUAN ELECTRONIC TECHNOLOGY CO LTD	YJG-1, YJG-2	V-0, 130°C	UL 796, UL 94	UL
(Alternative)	Interchangeable	Interchangeable	V-0, 130°C	UL 796, UL 94	UL
Fusible resistor (RF1)	Shenzhen Great Electronics Co. Ltd.	RXF	4.7Ω, 1W	IEC/EN 62368-1	Tested with appliance
(Alternative)	Dongguan Hongda Electronic Technology Co., Ltd.	RXF series	4.7Ω, 1W	IEC/EN 62368-1	Tested with appliance
Heat shrinkable tube (Used for RF1, EC3)	SHENZHEN WOER HEAT- SHRINKABLE MATERIAL CO LTD	RSFR-H	Min. 300V, min. 125°C, VW-1	UL 224	UL
(Alternative)	DONGGUAN SALIPT CO LTD	SALIPT S-901- 300, SALIPT S- 901-600, SALIPT S-HPT-600	Min. 300VAC, min. 125°C, VW-1	UL 224	UL
(Alternative)	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-1000	Min. 300VAC, min. 125°C, VW-1	UL 224	UL
(Alternative)	Interchangeable	Interchangeable	Min. 300VAC, min. 125°C, VW-1	UL 224	UL

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test		Result - Remark		Verdict
Choke (L1)	MADERORCE ELECTRONICS CO., LTD	AL0410-102K, AL0510-102K, AL0510-152K,	130°C	IEC/EN 62368-1	Tested with appliance
Transformer (T1)	YISHENG FU ELECTRONIC (SHENZHEN) CO LTD	KA06E-5V	Class B	IEC/EN 62368-1	Tested with appliance
- Insulation system	YISHENG FU ELECTRONIC (SHENZHEN) CO LTD	YSF-130	Class B	UL 1446	UL
- Bobbin	CHANG CHUN PLASTICS CO LTD	T375J	V-0, 150°C. Min. 0.50mm thickness, phenolic.	UL 94, UL 746C	UL
- Magnet wire (Primary winding)	SHANTOU SHENGANG ELECTRICAL INDUSTRIAL CO LTD	xUEW/130, QA-x/130	130°C	UL 1446	UL
(Alternative)	TAI-I ELECTRIC WIRE & CABLE CO LTD	UEW	130°C	UL 1446	UL
(Alternative)	DONG GUAN XIN YOU LIAN COPPER CO LTD	2UEW	130°C	UL 1446	UL
(Alternative)	HENG YA ELECTRIC (DONGGUAN) LTD	TYP-130(UEW/QA-B)	130°C	UL 1446	UL
(Alternative)	Interchangeable	Interchangeable	Min. 130°C	UL 1446	UL
- Triple Insulation wire (Secondary winding)	Great Leoflon Industrial Co., Ltd.	TRW(B) Serie(s)	130°C	IEC/EN 60950-1	VDE
- Insulation tape	JINGJIANG YAHUA PRESSURE SENSITIVE GLUE CO LTD	CT* (b)(g), PZ* (b)	130°C	UL 510	UL
- Tubing	GREAT HOLDING INDUSTRIAL CO LTD	TFT, TFS	Min. 300V, min. 200°C, VW-1	UL 224	UL

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

(Alternative)	SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO LTD	WF	Min. 300V, min. 200°C, VW-1	UL 224	UL
- Varnish	SUZHOU TAIHU ELECTRIC ADVANCED MATERIAL CO LTD	ET-90(a), T-1168(a), T-4260(a)	Min. 130°C	UL 1446	UL

Supplementary information:

1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests	N/A
-----------------	---	-----

(The following mechanical tests are conducted in the sequence noted.)

4.8.4.2	TABLE: Stress Relief test	—
---------	----------------------------------	---

Part	Material	Oven Temperature (°C)	Comments
--	--	--	--

4.8.4.3	TABLE: Battery replacement test	—
---------	--	---

Battery part no.	--	—
-----------------------	----	---

Battery Installation/withdrawal	Battery Installation/Removal Cycle	Comments
---------------------------------	------------------------------------	----------

--	1	--
	2	--
	3	--
	4	--
	5	--
	6	--
	7	--
	8	--
	9	--

4.8.4.4	TABLE: Drop test	—
---------	-------------------------	---

Impact Area	Drop Distance	Drop No.	Observations
--	--	1	--
--	--	2	--
--	--	3	--

4.8.4.5	TABLE: Impact	—
---------	----------------------	---

Impacts per surface	Surface tested	Impact energy (Nm)	Comments
---------------------	----------------	--------------------	----------

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.4, 4.8.5	TABLE: Lithium coin/button cell batteries mechanical tests			N/A
(The following mechanical tests are conducted in the sequence noted.)				
--	--	--	--	--
4.8.4.6	TABLE: Crush test			—
Test position		Surface tested	Crushing Force (N)	Duration force applied (s)
--	--	--	--	--
Supplementary information:				

4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result			N/A
Test position		Surface tested	Force (N)	Duration force applied (s)
--		--	--	--
Supplementary information:				

5.2	Table: Classification of electrical energy sources						P
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (Apk or Arms)	Hz	
1	264Va.c. 60Hz	All primary circuits	Normal	--	--	--	ES3 (declared)
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	
2	264Va.c. 60Hz	Transformer secondary pin A-B	Normal (output + and -)	21.3 Vrms	--	55K	ES1
			Abnormal: Over load	--	--	--	
			Single fault – SC Q51 pin D-S	0	--	--	
3	264Va.c. 60Hz	Output “+” to “-”	Normal (output + and -)	5.10Vd.c.	--	--	ES1
			Abnormal: Over load	5.09Vd.c.	--	--	
			Single fault – SC D3	0	--	--	
4	264Va.c.	Output “+” to	Normal	218Vpeak max	0.09mA peak (#)	60	ES1

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

60Hz	earth	Abnormal	--	--	--
		Single fault – Neutral open	380Vpeak max	0.11mA peak (@)	60

Supplementary information:

- SC - Short-circuited; OC - Open-circuited.

- #: Current (U_2 / 500 peak value) is measured using the measuring network specified in Figure 4, IEC 60990:1999.- @: Current (U_3 / 500 peak value) is measured using the measuring network specified in Figure 5, IEC 60990:1999.**5.2.2.3 - Capacitance Limits**

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class
				Capacitance, nF	Upk (V)	
1	264Va.c. 60Hz	Input terminal (Primary input filter circuits)	Normal	--	--	--
			Abnormal	--	--	--
			Single fault – SC/OC	--	--	--

5.2.2.4 - Single Pulses

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	Ipk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

5.2.2.5 - Repetitive Pulses

No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	Ipk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

Test Conditions:

Normal –

Abnormal -

Supplementary information: SC=Short Circuit, OC=Short Circuit



IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements							P
	Supply voltage (V)	264V, 50Hz	90V, 60Hz	Battery discharge mode				—
	Ambient T _{min} (°C)	40.0	40.0	40.0				—
	Ambient T _{max} (°C)	40.0	40.0	40.0				—
	T _{ma} (°C)	—						—
Maximum measured temperature T of part/at:		T (°C)						Allowed T _{max} (°C)
E-cap C1		89.4	101.5	56.1	67.2	78.3	90.1	105
E-cap C2		85.8	97.9	56.3	67.4	72.6	84.4	105
T1 winding		84.9	97.0	55.2	66.3	71.9	83.7	110
T1 core		91.2	103.3	56.4	67.5	83.9	95.7	110
PCB near T1		89.0	101.1	60.0	71.1	74.0	85.8	130
L1 winding		104.8	116.9	66.2	77.3	98.4	110.2	130
E-cap C52		85.4	97.5	55.9	67.0	77.4	89.2	105
PCB near Q15		101.5	113.6	83.2	94.3	93.3	105.1	130
E-cap C26		87.2	99.3	64.0	75.1	78.5	90.3	105
PCB near U1		78.0	90.1	53.1	64.2	73.5	85.3	130
L2 body		63.7	75.8	47.9	59.0	78.3	90.1	130
E-cap C3		75.0	87.1	53.5	64.6	68.7	80.5	105
PCB near USB		59.6	71.7	44.5	55.6	64.9	76.7	130
PCB near U13		65.3	77.4	48.1	59.2	72.2	84.0	130
PCB near U9		79.2	91.3	54.6	65.7	69.9	81.7	130
PCB near U15		77.9	90.0	50.9	62.0	63.9	75.7	130
D2 body		72.3	84.4	44.6	55.7	60.0	71.8	130
E-cap C23		58.8	70.9	28.1	39.2	63.6	75.4	105
PCB2 :								
Input line		52.3	64.4	47.8	58.9	48.0	59.8	80
LF1 winding		63.0	75.1	68.5	79.6	45.9	57.7	130
Y-cap CY1		54.0	66.1	54.1	65.2	45.3	57.1	125
L1 winding		64.9	77.0	62.4	73.5	49.1	60.9	130
E-cap C1		75.9	88.0	71.9	83.0	46.7	58.5	105
PCB near Q1		81.9	94.0	72.3	83.4	44.7	56.5	130
T1 core		78.0	90.1	72.7	83.8	46.8	58.6	110
T1 winding		85.5	97.6	76.3	87.4	46.2	58.0	110
PCB near T1		89.1	101.2	76.4	87.5	54.1	65.9	130

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test		Result - Remark				Verdict
Y-cap CY3	80.8	92.9	70.1	81.2	49.7	61.5	125
U1 body、	80.8	92.9	70.2	81.3	52.3	64.1	130
E-cap CE52	74.6	86.7	65.5	76.6	50.0	61.8	105
L2 body	104.7	116.8	92.6	103.7	53.4	65.2	130
Battery body	55.4	67.5	51.6	62.7	48.4	60.2	Ref
Battery line	64.1	76.2	56.8	67.9	49.3	61.1	105
Enclosure inside	41.6	53.7	37.6	48.7	39.2	51.0	Ref
Ambient	27.9	40.0	28.9	40.0	28.2	40.0	--
Accessible part of unit							
Plug holder	45.4	57.5	42.8	53.9	43.7	55.5	77#
Enclosure outside	37.3	49.4	36.3	47.4	37.3	49.1	77#
Supplementary information: --							
Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class
--	--	--	--	--	--	--	B
Supplementary information: - The maximum operating temperature is 40°C. E. # means surfaces touched in normal use (> 1 min).							

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics		N/A
Penetration (mm).....:	--		—
Object/ Part No./Material	Manufacturer/t rademark	T softening (°C)	
--	--	--	
supplementary information:			

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics		N/A
Allowed impression diameter (mm)	≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)
--	--	--	--
Supplementary information: --			

5.4.2.2, 5.4.2.4 and 5.4.3	TABLE: Minimum Clearances/Creepage distance						P
Clearance (cl) and creepage distance (cr) at/of/between:	Up (V)	U r.m.s. (V)	Frequency (kHz)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)
L to N before F1 (BI)	<420	240	<30	1.27	3.0	2.4	>3.0

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Across F1 (BI)	<420	240	<30	1.27	3.0	2.4	3.0
Primary trace to secondary trace under T1 (RI)	488	240	55	2.54	13.0	4.8	13.0
Core to U1 secondary pin	488	240	55	2.54	3.5	4.8	3.5
Across U1	488	240	55	2.54	5.2	4.8	5.2
Across CY1	488	240	55	2.54	6.3	4.8	6.3

Supplementary information:

Note 1: Only for frequency above 30 kHz;

Note 2: See table 5.4.2.4 if this is based on electric strength test;

Note 3: Provide Material Group IIIa/IIIb;

Note 4: BI: basic insulation; SI: supplementary insulation; DI: double insulation; RI: reinforced insulation;

Note 5: Ferrite core of transformer T1 considered as primary live part;

Note 6: If no specified, the worst conditions were recorded;

Note 7: Clearance was evaluated for altitude up to 2000m above sea level, correction factor for clearance is 1.48.

5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			P
	Overvoltage Category (OV):			II
	Pollution Degree:			2
Clearance distanced between:		Required withstand voltage	Required cl (mm)	Measured cl (mm)
L to N before F1 (BI)		2500Vpeak	1.5	>3.0
Across F1 (BI)		2500Vpeak	1.5	3.0
Primary trace to secondary trace under T1 (RI)		2500Vpeak	1.5	13.0
Core to U1 secondary pin		2500Vpeak	3.0	3.5
Across U1		2500Vpeak	3.0	5.2
Across CY1		2500Vpeak	3.0	6.3
Supplementary information:				
Note 1: BI: basic insulation; SI: supplementary insulation; DI: double insulation; RI: reinforced insulation;				
Note 2: Ferrite core of transformer T1 considered as primary live part;				
Note 3: If no specified, the worst conditions were recorded;				
Note 4: Clearance was evaluated for altitude up to 5000m above sea level, correction factor for clearance is 1.48.				

5.4.2.4	TABLE: Clearances based on electric strength test	N/A
----------------	--	------------

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014			
Clause	Requirement + Test	Result - Remark	Verdict

Test voltage applied between:	Required cl (mm)	Test voltage (Kv) peak/ r.m.s. / d.c.	Breakdown Yes / No
--	--	--	--
Supplementary information: Not used the alternative method to determine the clearances.			

5.4.4.2, 5.4.4.5 c) 5.4.4.9	TABLE: Distance through insulation measurements					P
Distance through insulation di at/of:	Peak voltage (V)	Frequency (Hz)	Material	Required DTI (mm)	DTI (mm)	
Enclosure	488	55K	Plastic	0.4	Min. 1.5	
Supplementary information: --						

5.4.9	TABLE: Electric strength tests			P
Test voltage applied between:		Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Functional:				
--	--	--	--	
Basic/supplementary:				
L to N before F1 (F1 disconnected)	DC	2500	No	
Reinforced:				
L/N to accessible enclosure with metal foil	DC	4000	No	
L/N to output terminal	DC	4000	No	
T1: primary to secondary	DC	4000	No	
T1: core to secondary	DC	4000	No	
T1: one layer of insulation tape #	DC	4000	No	
Routine Tests:				
--	--	--	--	
Supplementary information: # means all materials listed in table 4.1.2 are considered.				

5.5.2.2	TABLE: Stored discharge on capacitors					N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification	
--	--	--	--	--	--	

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Supplementary information:

X-capacitors installed for testing are:

☐ bleeding resistor rating:☐ ICX:

Notes:

A. Test Location:

Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth

B. Operating condition abbreviations:

N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition

5.6.6.2	TABLE: Resistance of protective conductors and terminations				P
Accessible part	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)	
PE terminal of AC inlet to protective conductor in PCB	32	2	0.58	0.018	
Supplementary information:					

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part		P
Supply voltage	--	—	
Location	Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7	Touch current (mA)	
<u>Measured to protective earthing terminal</u>	1	<u>N/A</u>	
	2*	<u>N/A</u>	
	3	<u>N/A</u>	
	4	<u>N/A</u>	
	5	<u>N/A</u>	
	6	<u>N/A</u>	
	8	<u>N/A</u>	
Supplementary Information: --			
Notes:			
[1] Supply voltage is the anticipated maximum Touch Voltage			
[2] Earthed neutral conductor [Voltage differences less than 1% or more]			
[3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3			
[4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.			
[5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.			

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

N: Normal condition, R: Reverse condition.

6.2.2	Table: Electrical power sources (PS) measurements for classification				P
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s*)	PS Classification
Power source from AC Mains.					
A	All primary circuit/ components	Power (W) :	--	--	PS3 (declared)
		V _A (V) :	--	--	
		I _A (A) :	--	--	
B#	(Normal condition)	Power (W) :	13.31	--	PS1
		V _A (V) :	5.109	--	
		I _A (A) :	2.70	--	
B#	USB2 output (Normal condition)	Power (W) :	11.8	--	PS1
		V _A (V) :	5.09	--	
		I _A (A) :	2.68	--	
C&	output (SC Q2 pin 8-1)	Power (W) :	0	--	PS1
		V _A (V) :	0	--	
		I _A (A) :	0	--	
D&	output (SC R24)	Power (W) :	0	--	PS1
		V _A (V) :	0	--	
		I _A (A) :	0	--	
E&	5.0V output (SC Q51 pin D-S)	Power (W) :	0	--	PS1
		V _A (V) :	0	--	
		I _A (A) :	0	--	
Power source from battery.					
A	All primary circuit/ components	Power (W) :	--	--	PS3 (declared)
		V _A (V) :	--	--	
		I _A (A) :	--	--	
B#	(Normal condition)	Power (W) :	13.31	--	PS1
		V _A (V) :	4.948	--	
		I _A (A) :	2.69	--	
B#	USB2 output (Normal condition)	Power (W) :	11.8	--	PS1
		V _A (V) :	4.41	--	
		I _A (A) :	2.67	--	
C&	output (SC U18 pin 31-17)	Power (W) :	0	--	PS1
		V _A (V) :	0	--	

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014			
Clause	Requirement + Test	Result - Remark	Verdict

	I _A (A)	:	0	--	
Supplementary Information: Measurement taken only when limits at 3 seconds exceed PS1 limits. #: Test method-power measurement for worst-case fault. &: Test method-power measurement for worst-case power source fault. SC - Short-circuited.					


6.2.3.1	Table: Determination of Potential Ignition Sources (Arcing PIS)			P
Location	Open circuit voltage After 3 s (V _p)	Measured r.m.s current (I _{rms})	Calculated value (V _p x I _{rms})	Arcing PIS? Yes / No
Input terminal, All Internal circuits	--	--	--	Yes
All secondary circuits	<50	>0.3	>15	No
Supplementary information: All primary circuit/components were considered as arcing PIS, the open circuit of all secondary components/ circuit were not exceeded 50V. An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V _p) and normal operating condition rms current (I _{rms}) is greater than 15.				

6.2.3.2	Table: Determination of Potential Ignition Sources (Resistive PIS)				P
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No
Input terminal, All Internal circuits	--	--	--	--	Yes
All secondary circuits	--	<100	>15	--	Yes
Supplementary Information: All primary components were considered as resistive PIS, the output circuits/ components were considered as resistive PIS. A combination of voltmeter, VA and ammeter I _A may be used instead of a wattmeter. If a separate voltmeter and ammeter are used, the product of (VA x I _A) is used to determine Resistive PIS classification. A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.					

8.5.5	TABLE: High Pressure Lamp		N/A
Description	Values	Energy Source Classification	
Lamp type	--	—	

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

 Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Manufacturer.....:	--	—
Cat no.....:	--	—
Pressure (cold) (MPa)	--	MS_
Pressure (operating) (MPa).....:	--	MS_
Operating time (minutes).....:	--	—
Explosion method	--	—
Max particle length escaping enclosure (mm) .:	--	MS_
Max particle length beyond 1 m (mm)	--	MS_
Overall result	--	
Supplementary information: --		

B.2.5 TABLE: Input test							P
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
90V, 50Hz	0.742	--	37.1	--	F1	0.150	Battery was empty, and only battery charge mode. Battery charge current: 1.93A
90V, 60Hz	0.744	--	37.3	--	F1	0.152	
100V, 50Hz	0.664	0.25	37.3	--	F1	0.138	
100V, 60Hz	0.668	0.25	37.0	--	F1	0.140	
240V, 50Hz	0.367	0.25	36.7	--	F1	0.078	
240V, 60Hz	0.364	0.25	36.9	--	F1	0.073	
264V, 50Hz	0.333	--	36.6	--	F1	0.077	
264V, 60Hz	0.329	--	36.8	--	F1	0.070	Battery was empty, and only battery charge mode. Battery charge current: 0.23A
90V, 50Hz	0.718	--	35.9	--	F1	0.150	
90V, 60Hz	0.721	--	35.8	--	F1	0.152	
100V, 50Hz	0.648	0.25	35.6	--	F1	0.138	
100V, 60Hz	0.651	0.25	35.7	--	F1	0.140	
240V, 50Hz	0.356	0.25	35.8	--	F1	0.078	
240V, 60Hz	0.354	0.25	35.5	--	F1	0.073	
264V, 50Hz	0.328	--	35.6	--	F1	0.077	Battery was fully, and only battery discharge mode. Battery discharge current: 21.22A AC load: 500W
264V, 60Hz	0.325	--	35.6	--	F1	0.070	
--	--	--	--	--	--	--	
Supplementary information: --							

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

B.3		TABLE: Abnormal operating condition tests						P
Ambient temperature (°C)		--						—
Power source for EUT: Manufacturer, model/type, output rating ..		--						—
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
USB Output	O-L	264VAC	2 h 20 min	RF1	Max. 0.367A	Type K	T1 coil: 99.2°C, T1 core: 92.3°C, Max. PCB (PCB near U1): 86.2°C, Ambient: 40.0°C. Enclosure (outside, near T1): 41.1°C, Plug holder (outside): 36.3°C, Ambient: 25.0°C.	Max. loaded current was 2.7A, and ran for thermal equilibrium under it. When loaded 2.7A unit shut down immediately. No damage, no hazard.
Supplementary information: Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4. S-C: short circuit, O-L: overload, O-C: open circuit; CD: Components damaged; The Hi-pot test conducted successfully after the completion of fault condition test. Temperature limits under the fault condition: 1. Temperature limits under the fault condition: T1 winding limit: 165°C (class B), Enclosure outside: 87°C, For other parts: 300°C.								

B.4		TABLE: Fault condition tests						P
-----	--	------------------------------	--	--	--	--	--	---

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Ambient temperature (°C)						25°C (unless otherwise specified)		—
Power source for EUT: Manufacturer, model/type, output rating ..						See page 2		—
Component No.	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
Power source from AC Mains								
BD1 pin 1-2 #	S-C	264	< 1 s	F1	0	--	--	After S-C, F1 opened immediately, BD1 damaged, No hazard.
EC1 #	S-C	264	< 1 s	F1	0	--	--	After S-C, F1 opened immediately, BD1 damaged, No hazard.
CE1	S-C	264	< 1 s	F1	0	--	--	After S-C, F1 opened immediately, no hazard.
Q1 pin D-S #	S-C	264	10 min	F1	0	--	--	After S-C, F1 opened immediately, Q1 damaged, No hazard.
U3 pin 8-7	S-C	264	10 min	F1	0.005	--	--	After S-C, unit shut down immediately. No damage, no hazard.
Q51 pin D-S	S-C	264	< 1 s	F1	0.005	--	--	After S-C, unit shut down immediately. No damage, no hazard.
CE51	S-C	264	< 1 s	F1	0.005	--	--	After S-C, unit shut down immediately. No damage, no hazard.
Battery was charged, battery was empty.								

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
 400-003-0500
 www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test					Result - Remark		Verdict
Q2 pin 1-8	S-C	264	< 1 s	F1	0.327	--	--	After S-C, unit normal working, No damage, no hazard. Battery charge current: 1.93A
U1 pin 16-10	S-C	264	< 1 s	F1	0.328	--	--	After S-C, unit normal working, Q1 damaged, No hazard. Battery charge current: 1.80A
U15 pin 2-3	S-C	264	10 min	F1	0.328	--	--	After S-C, unit normal working. USB output shutdown, no damage, no hazard. Battery charge current: 1.93A
U9 pin 24-16	S-C	264	10 min	F1	0.329	--	--	After S-C, unit normal working. no damage, no hazard. Battery charge current: 1.93A
Power source from battery, battery was fully								
USB output	O-L		1h25mins	--	--	--	--	Unit normal working, battery discharge: 4.06A
U18 pin 17-31	S-C	--	10 min	F1	--	--	--	After S-C, unit shut down immediately. No damage, no hazard. Battery discharge: 0A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test				Result - Remark			Verdict
--------	--------------------	--	--	--	-----------------	--	--	---------

C1	S-C	--	10 min	F1	--	--	--	After S-C, unit shut down immediately. No damage, no hazard. Battery discharge: 0A
U1 pin 1-2	S-C	--	10 min	F1	--	--	--	After S-C, unit shut down immediately. No damage, no hazard. Battery discharge: 0A
U1 pin 3-4	S-C	--	10 min	F1	--	--	--	After S-C, unit shut down immediately. No damage, no hazard. Battery discharge: 0A
AC output	S-C	--	10 min	F1	--	--	--	After S-C, unit normal working. no damage, no hazard. Battery discharge: 0A

Supplementary information:

- 1) S-C: short circuit, O-L: overload, O-C: open circuit; C-D: components damaged;
- 2) The Hi-pot test conducted successfully after the completion of fault condition test;
- 3) # means all types of fusible resistor listed in table 4.1.2 are considered for test and same result came out.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Annex M	TABLE: Batteries								P
The tests of Annex M are applicable only when appropriate battery data is not available									
Is it possible to install the battery in a reverse polarity position?..... :									
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	--	--	--	1.93A	5A	3.98A	10A	--	--
Max. current during fault condition	--	--	--	1.93A	5A	4.06A	10A	--	--
Test results:								Verdict	
- Chemical leaks								P	
- Explosion of the battery								P	
- Emission of flame or expulsion of molten metal								P	
- Electric strength tests of equipment after completion of tests								P	
Supplementary information:									

Annex M.4	Table: Additional safeguards for equipment containing secondary lithium batteries					P
Battery/Cell No.	Test conditions	Measurements			Observation	
		U	I (A)	Temp (C)		
1#	Normal working	15.18	1.93	Battery cell: 55.7 Ambient: 27.3	Unit normal working.	
1#	Single fault –SC (Q2 pin 1-8)	15.18	1.93	Battery cell: 55.7 Ambient: 27.3	After S-C, unit shut down immediately. No damage, no hazard. Battery charge current: 1.93A	

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

1#	Single fault –SC (U1 pin 16-10)	15.19	1.80	Battery cell: 55.7 Ambient: 27.3	After S-C, unit normal working, Q1 damaged, No hazard. Battery charge current: 1.80A
1#	Single fault –SC (U15 pin 2-3)	15.18	1.93	Battery cell: 55.7 Ambient: 27.3	After S-C, unit normal working. USB output shutdown, no damage, no hazard. Battery charge current: 1.93A
1#	Single fault –SC (U9 pin 24-16)	15.19	1.93	Battery cell: 54.9 Ambient: 27.0	After S-C, unit normal working. no damage, no hazard. Battery charge current: 1.93A
1#	Abnormal after drop	15.18	1.93	Battery cell: 55.8 Ambient: 27.4	Unit normal working.

Supplementary Information:

Battery identification	Charging at T_{lowest} (°C)	Observation	Charging at $T_{highest}$ (°C)	Observation
Battery Cell	0	Unit shutdown	>49	Unit shutdown

Supplementary Information:

Annex Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)	P
-----------	---	---

Note: Measured UOC (V) with all load circuits disconnected:

Output Circuit	Components	U _{oc} (V)	I _{sc} (A)		S (VA)	
			Meas.	Limit	Meas.	Limit
	Normal operation	5.15	2.70	8.0	13.84	100
	SC (U15 pin 2-3)	5.13	2.68	8.0	13.83	100
	SC (R2)	5.11	2.69	8.0	13.83	100
	SC (U17 pin 17-31)	0	0	8.0	0	100

Supplementary Information:

SC=Short circuit, OC=Open circuit.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

IEC 62368-1:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

T.2, T.3, T.4, T.5	TABLE: Steady force test					P
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Internal components	--	--	10	5	Clearances and creepage distances still complied with the requirements of this standard	
Enclosure top	Plastic	Min. 1.5	100	5	Enclosure remained intact	
Enclosure bottom	Plastic	Min. 1.5	100	5	Enclosure remained intact	
Enclosure Side	Plastic	Min. 1.5	100	5	Enclosure remained intact	
Supplementary information: --						


T.6, T.9	TABLE: Impact tests					N/A
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation		
--	--	--	--	--		
Supplementary information:						

T.7	TABLE: Drop tests					P
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation		
Top	Plastic	Min. 1.5	1000	No damaged		
Side	Plastic	Min. 1.5	1000	No damaged		
Bottom	Plastic	Min. 1.5	1000	No damaged		
Supplementary information: --						

T.8	TABLE: Stress relief test					P
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Overall enclosure	Plastic	Min. 1.5	70	7	No damaged	
Supplementary information: --						

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
 400-003-0500
 www.anbotek.com

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

IEC62368_1B - ATTACHMENT																																										
Clause		Requirement + Test			Result - Remark		Verdict																																			
<div>ATTACHMENT TO TEST REPORT</div> <div>IEC 62368-1</div> <div>EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES</div> <div>(Audio/video, information and communication technology equipment - Part 1: Safety requirements)</div>																																										
Differences according to		EN 62368-1:2014+SHENZHEN ECOFLOW TECHNOLOGY LIMITED1:2017																																								
Attachment Form No.		EU_GD_IEC62368_1B_II																																								
Attachment Originator.....		Nemko AS																																								
Master Attachment		Date 2017-09-22																																								
Copyright © 2017 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.																																										
	CENELEC COMMON MODIFICATIONS (EN)					Verdict																																				
	Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2014 are prefixed “Z”.					--																																				
CONTENT S	<div>Add the following annexes:</div> <div><div>Annex ZA (normative)</div><div>Normative references to international publications with their corresponding European publications</div><div>Annex ZB (normative)</div><div>Special national conditions</div><div>Annex ZC (informative)</div><div>A-deviations</div><div>Annex ZD (informative)</div><div>IEC and CENELEC code designations for flexible cords</div></div>					P																																				
	<div>Delete all the “country” notes in the reference document (IEC 62368-1:2014) according to the following list:</div> <table><tr><td>0.2.1</td><td>Note</td><td>1</td><td>Note 3</td><td>4.1.15</td><td>Note</td></tr><tr><td>4.7.3</td><td>Note 1 and 2</td><td>5.2.2.2</td><td>Note</td><td>5.4.2.3.2.2 Table 13</td><td>Note c</td></tr><tr><td>5.4.2.3.2.4</td><td>Note 1 and 3</td><td>5.4.2.5</td><td>Note 2</td><td>5.4.5.1</td><td>Note</td></tr><tr><td>5.5.2.1</td><td>Note</td><td>5.5.6</td><td>Note</td><td>5.6.4.2.1</td><td>Note 2 and 3</td></tr><tr><td>5.7.5</td><td>Note</td><td>5.7.6.1</td><td>Note 1 and 2</td><td>10.2.1 Table 39</td><td>Note 2, 3 and 4</td></tr><tr><td>10.5.3</td><td>Note 2</td><td>10.6.2.1</td><td>Note 3</td><td>F.3.3.6</td><td>Note 3</td></tr></table>					0.2.1	Note	1	Note 3	4.1.15	Note	4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c	5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note	5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3	5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4	10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3	P
0.2.1	Note	1	Note 3	4.1.15	Note																																					
4.7.3	Note 1 and 2	5.2.2.2	Note	5.4.2.3.2.2 Table 13	Note c																																					
5.4.2.3.2.4	Note 1 and 3	5.4.2.5	Note 2	5.4.5.1	Note																																					
5.5.2.1	Note	5.5.6	Note	5.6.4.2.1	Note 2 and 3																																					
5.7.5	Note	5.7.6.1	Note 1 and 2	10.2.1 Table 39	Note 2, 3 and 4																																					
10.5.3	Note 2	10.6.2.1	Note 3	F.3.3.6	Note 3																																					
	For special national conditions, see Annex ZB.					N/A																																				

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

 Hotline
 400-003-0500
 www.anbotech.com

IEC62368_1B - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
1	Add the following note: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.		N/A
4.Z1	Add the following new subclause after 4.9: To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains , protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c): a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment; b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation; c) it is permitted for pluggable equipment type B or permanently connected equipment , to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions. If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.		N/A
5.4.2.3.2.4	Add the following to the end of this subclause: The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.		N/A
10.2.1	Add the following to c) and d) in table 39: For additional requirements, see 10.5.1.		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.5.1	<p>Add the following after the first paragraph:</p> <p><i>For RS 1 compliance is checked by measurement under the following conditions:</i></p> <p><i>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or presets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</i></p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p><i>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</i></p> <p><i>Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</i></p> <p><i>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</i></p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p>		N/A
10.6.1	<p>Add the following paragraph to the end of the subclause:</p> <p>EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p>		N/A
10.Z1	<p>Add the following new subclause after 10.6.5.</p> <p>10.Z1 Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz).</p> <p>For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body-mounted devices, attention is drawn to EN 50360 and EN 50566</p>		N/A
G.7.1	<p>Add the following note:</p> <p>NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Bibliography	<p>Add the following standards:</p> <p>Add the following notes for the standards indicated:</p> <p>IEC 60130-9 NOTE Harmonized as EN 60130-9.</p> <p>IEC 60269-2 NOTE Harmonized as HD 60269-2.</p> <p>IEC 60309-1 NOTE Harmonized as EN 60309-1.</p> <p>IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series.</p> <p>IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4.</p> <p>IEC 60664-5 NOTE Harmonized as EN 60664-5.</p> <p>IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified).</p> <p>IEC 61508-1 NOTE Harmonized as EN 61508-1.</p> <p>IEC 61558-2-1 NOTE Harmonized as EN 61558-2-1.</p> <p>IEC 61558-2-4 NOTE Harmonized as EN 61558-2-4.</p> <p>IEC 61558-2-6 NOTE Harmonized as EN 61558-2-6.</p> <p>IEC 61643-1 NOTE Harmonized as EN 61643-1.</p> <p>IEC 61643-21 NOTE Harmonized as EN 61643-21.</p> <p>IEC 61643-311 NOTE Harmonized as EN 61643-311.</p> <p>IEC 61643-321 NOTE Harmonized as EN 61643-321.</p> <p>IEC 61643-331 NOTE Harmonized as EN 61643-331.</p>		N/A
ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
4.1.15	<p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows:</p> <p>In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord."</p> <p>In Finland: "Laitte on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordnet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p>		P
4.7.3	<p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.2	Denmark After the 2nd paragraph add the following: A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		P
5.4.11.1 and Annex G	Finland and Sweden To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5kV. It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2. A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions: <ul style="list-style-type: none"> • the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; • the additional testing shall be performed on all the test specimens as described in EN 60384-14; the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14. 		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.2.1	Norway After the 3rd paragraph the following is added: Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).		P
5.5.6	Finland, Norway and Sweden To the end of the subclause the following is added: Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.		N/A
5.6.1	Denmark Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.		N/A
5.6.4.2.1	Ireland and United Kingdom After the indent for pluggable equipment type A , the following is added: – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.		N/A
5.6.5.1	To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm ² to 1,5 mm ² in cross-sectional area.		N/A
5.7.5	Denmark To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.1	<p>Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”</p>		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6.2	Denmark To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA .		N/A
B.3.1 and B.4	Ireland and United Kingdom The following is applicable: To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment , tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment , until the requirements of Annexes B.3.1 and B.4 are met		P
G.4.2	Denmark To the end of the subclause the following is added: Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011. CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a. If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2. Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a or DKA 1-1c. Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a Justification: Heavy Current Regulations, Section 6c		N/A

IEC62368_1B - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
G.4.2	United Kingdom To the end of the subclause the following is added: The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A
G.7.1	United Kingdom To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	Ireland To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	Ireland and United Kingdom To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm ² is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A

IEC62368_1B - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
10.5.2	<p>Germany</p> <p>The following requirement applies:</p> <p>For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking.</p> <p>Justification:</p> <p>German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM.</p> <p>NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int +49-531-592-6320, Internet: http://www.ptb.de</p>		N/A

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

Photo:

Photo 1

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☒ top
- ☐ bottom
- ☐ internal

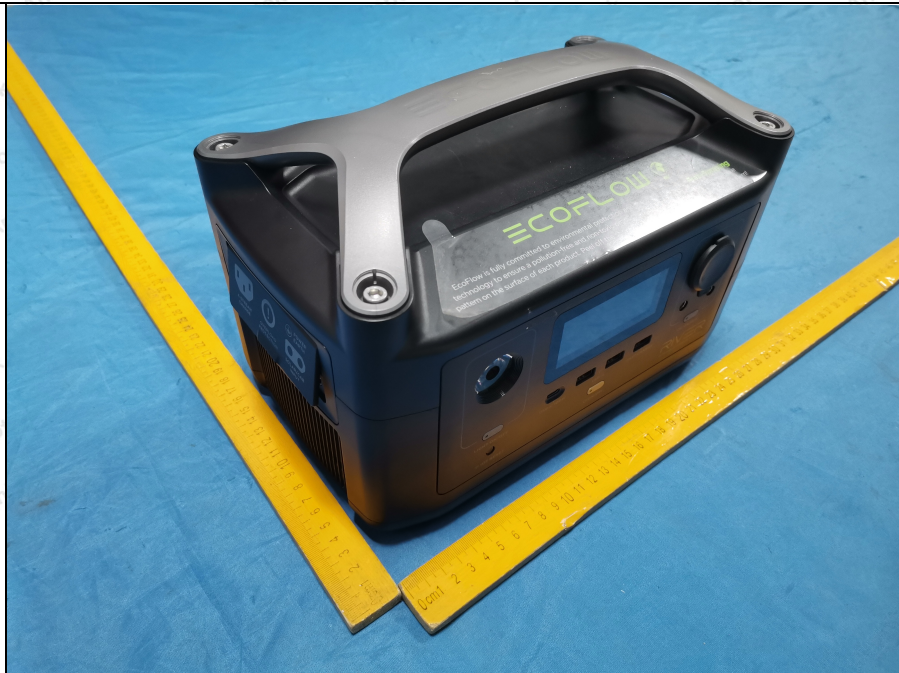


Photo 2

- ☐ front
- ☐ rear
- ☒ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☐ internal




Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com


 Hotline
400-003-0500
www.anbotek.com

Photo 3

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☒ internal

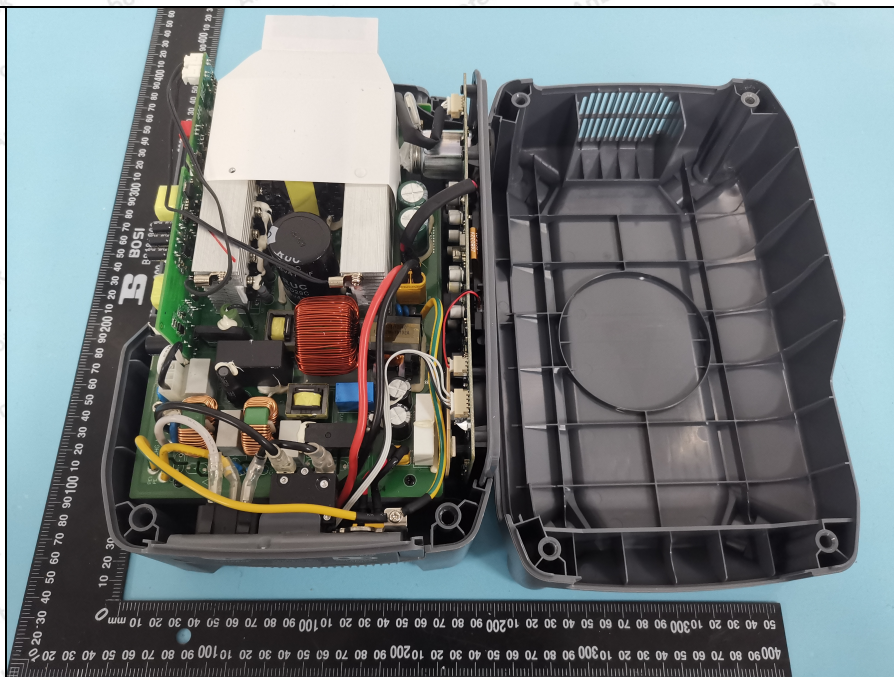**Photo 4**

- ☐ front
- ☐ rear
- ☐ right side
- ☐ left side
- ☐ top
- ☐ bottom
- ☒ internal

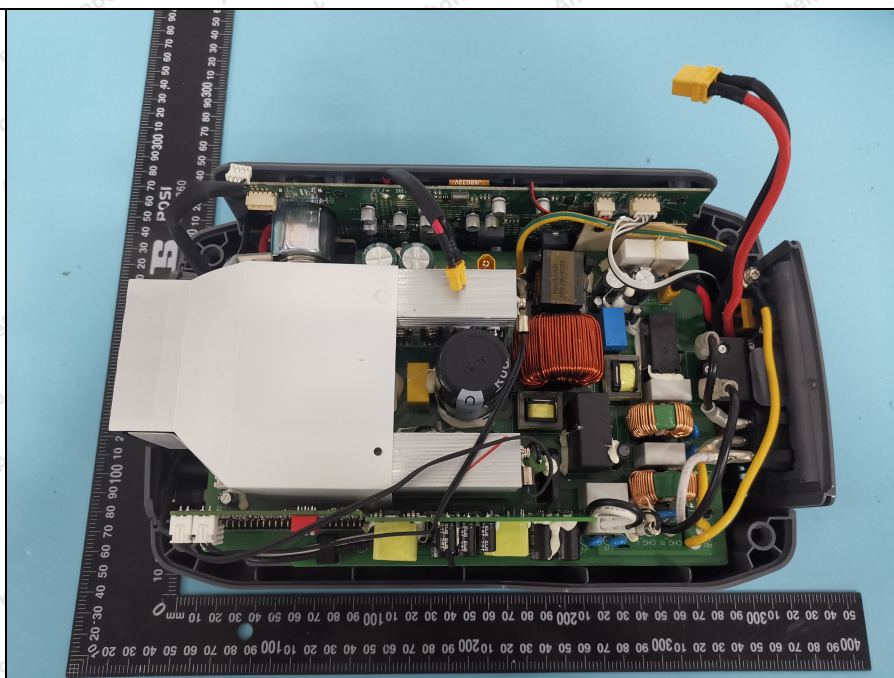

End of the report