

RED-Radio Test Report

Client Name : EcoFlow Inc.
Address : Factory Building A202, Founder Technology Industrial
Park, Longteng Community, Shiyan Sub-district, Baoan,
Shenzhen, Guangdong, China
Product Name : Portable Power Station
Date : Oct. 15, 2021



Shenzhen Anbotech Compliance Laboratory Limited

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Configuration.....	6
1.5. Test Conditions.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. RF Output Power.....	10
3.1. RF Output Power Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Power Spectral Density.....	11
4.1. Test Limit.....	11
4.2. Test Setup.....	11
4.3. Test Procedure.....	11
4.4. Test Data.....	11
5. Adaptivity.....	12
5.1. Test Limit.....	12
5.2. Test Setup.....	13
5.3. Test Procedure.....	13
5.4. Test Data.....	13
6. Occupied Channel Bandwidth.....	20
6.1. Test Limit.....	20
6.2. Test Setup.....	20
6.3. Test Procedure.....	20
6.4. Test Data.....	20
7. Transmitter Unwanted Emissions in the out-of-band Domain.....	21
7.1. Test Limit.....	21
7.2. Test Setup.....	21
7.3. Test Procedure.....	21
7.4. Test Data.....	22
8. Transmitter Unwanted Emissions in the Spurious Domain.....	23
8.1. Test Limit.....	23
8.2. Test Setup.....	23
8.3. Test Procedure.....	23
8.4. Test Data.....	24

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

9. Receiver Spurious Emissions.....	25
9.1. Test Limit.....	25
9.2. Test Setup.....	25
9.3. Test Procedure.....	25
9.4. Test Data.....	26
10. Receiver Blocking.....	27
10.1. Test Limit.....	27
10.2. Test Setup.....	29
10.3. Test Procedure.....	29
10.4. Minimum Performance Declaration.....	29
10.5. Test Data.....	30
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	33
APPENDIX II -- Appendix Test Data.....	34

TEST REPORT

Applicant : EcoFlow Inc.

Manufacturer : EcoFlow Inc.

Product Name : Portable Power Station

Model No. : EFD310

Trade Mark :



Input Ports:

AC Charge: 2000W Max

AC Input Voltage: 220-240V~10A, 50Hz/60Hz

Solar Charger: 11-100V= 10A Max, 800W Max

Output Ports: 2786W total

Rating(s) : 12V(x1): 12.6V= 10A, 126W Max

AC(x4): 230V~10A, 50Hz/60Hz, 2400W total (surge 4600W)

USB-A(x2): 5V= 2.4A, 12W Max, per port

USB-A Fast Charge(x2): 5V= 2.4A, 9V= 2A, 12V= 1.5A, 18W Max

USB-C(x2): 5/9/12/15/20V= 5A, 100W Max

Battery Inside: 50.4V, 2016Wh

Test Standard(s) : ETSI EN 300 328 V2.2.2 (2019-07)

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the ETSI EN 300 328 V2.2.2 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Aug. 31, 2021

Date of Test

Aug. 31 ~ Oct. 08, 2021

Prepared By

(Ella Liang)

Approved & Authorized Signer

(Kingkong Jin)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500


www.anbotek.com

1. General Information

1.1. Client Information

Applicant	:	EcoFlow Inc.
Address	:	Factory Building A202, Founder Technology Industrial Park, Longteng Community, Shiyan Sub-district, Baoan, Shenzhen, Guangdong, China
Manufacturer	:	EcoFlow Inc.
Address	:	Factory Building A202, Founder Technology Industrial Park, Longteng Community, Shiyan Sub-district, Baoan, Shenzhen, Guangdong, China
Factory	:	EcoFlow Inc.
Address	:	Factory Building A202, Founder Technology Industrial Park, Longteng Community, Shiyan Sub-district, Baoan, Shenzhen, Guangdong, China

1.2. Description of Device (EUT)

Product Name	:	Portable Power Station
Model No.	:	EFD310
Trade Mark	:	
Test Power Supply	:	AC 230V, 50Hz for adapter/ DC 50.4V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	2412-2472MHz
	Number of Channel:	13 Channels for 802.11b/g/n(HT20)
	Modulation Type:	CCK, DQPSK, DBPSK for DSSS; 64QAM, 16QAM, QPSK, BPSK for OFDM
	Antenna Type:	PCB Antenna
	Antenna Gain(Peak):	2.07 dBi (Provided by customer)
	Adapter:	N/A
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

For 2.4GHz WiFi, 13 channels are provided to testing as below table:

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1, 7, 13.

1.5. Test Conditions

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 30°C	-10°C ~ 35°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 50.4V Battery inside	N/A
Note: (1) The HT 35°C and LT -10°C was declared by manufacturer;		

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

1.7. Measurement Uncertainty

For the test methods, according to ETSI EN 300 328 standard, the measurement uncertainty figures shall be calculated in accordance with ETR 100 028-1 [4] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Maximum measurement uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1,5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$
Humidity	$\pm 5 \%$
DC and low frequency voltages	$\pm 3 \%$
Time	$\pm 5 \%$
Duty Cycle	$\pm 5 \%$

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

2. Summary of Test Results


List of Measurements			
No	Test Items	Clause No.	Results
Transmitter Items			
1	RF Output Power	4.3.2.2	Complies
2	Power Spectral Density	4.3.2.3	Complies
3	Duty Cycle, TX-Sequence, TX-gap	4.3.2.4	N/A Note (2)(3)
4	Medium Utilization (MU) factor	4.3.2.5	N/A Note (2)(3)
5	Adaptivity	4.3.2.6	Complies
6	Occupied Channel Bandwidth	4.3.2.7	Complies
7	Transmitter Unwanted Emissions in the Out-Of-Band Domain	4.3.2.8	Complies
8	Transmitter Unwanted Emissions in the Spurious Domain	4.3.2.9	Complies
Receiver Items			
9	Receiver spurious emissions	4.3.1.11	Complies
10	Receiver Blocking	4.3.2.12	Complies
Note:			
(1) "N/A": indicates test is not applicable in this Test Report.			
(2) This requirement does not apply for equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.			
(3) This requirement applies to non-adaptive equipment or to adaptive equipment when operating in a non-adaptive mode.			
(4) This requirement does not apply to adaptive equipment unless operating in non-adaptive mode.			

3. RF Output Power

3.1. RF Output Power Limit

Condition	Limit
<input type="checkbox"/> Non-adaptive frequency hopping systems	Equal to or less than the value declared by the manufacturer. This declared value shall be equal to or less than 20 dBm.
<input checked="" type="checkbox"/> Adaptive frequency hopping systems	20dBm

3.2. Test Setup

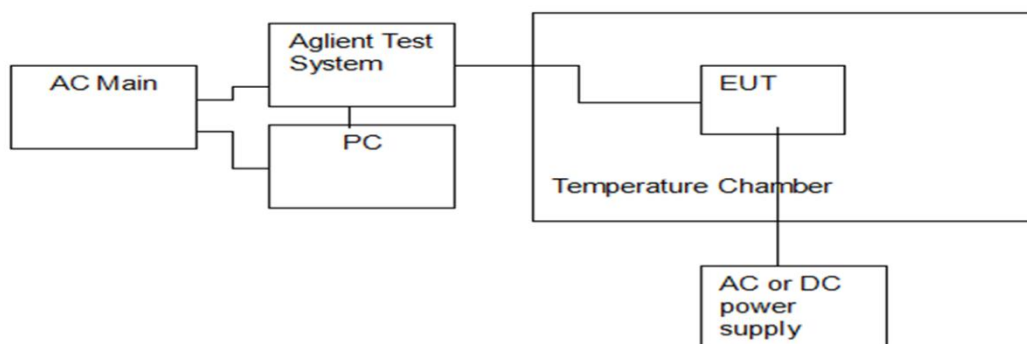

3.3. Test Procedure

Refer to chapter 5.4.2.2.1 of ETSI EN 300 328 V2.2.2.

1. Run a test program to control EUT transmitting at specific channel
2. Connect the power sensor to the transmit port
3. Power Meter was setting as below:

Sample speed: 1 MS/s

Number of bursts: at least 10bursts

Detector: RMS

4. A power meter was used to read the response of the power sensor

5. Define Start time and Stop time of a burst by 30dB below the highest value of the stores samples.

6. Find the highest burst value

7. Record the power level

8. EIRP = antenna gain + power level of step 7.

3.4. Test Data

Pass


Please refer to Appendix A of the Appendix Test Data.

4. Power Spectral Density

4.1. Test Limit

Condition	Frequency BAND	Limit (e.i.r.p.)
Under normal conditions	2400 ~ 2483.5 MHz	10dBm / 1MHz

4.2. Test Setup

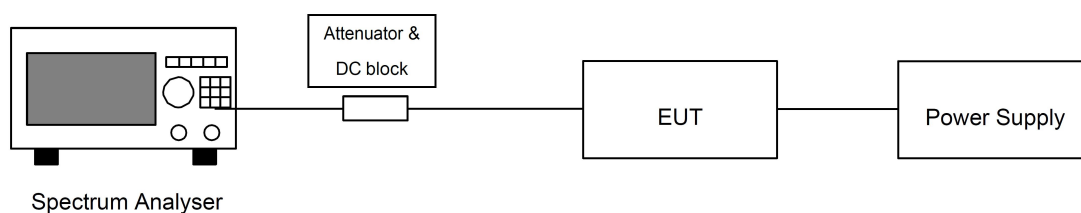

4.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2 Clause 5.4.3.

Connect the UUT to the spectrum analyzer and use the following settings:

Frequency range	2400MHz-2483.5MHz
RBW/VBW	10kHz/30kHz
Sweep points/time	>8350 / 10S
Detector	RMS
Trace	Max hold

4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.

5. Adaptivity

5.1. Test Limit

See clause 5.1 of ETSI EN 300 328 V2.2.2 for the test conditions. These measurements shall only be performed at normal test conditions.

When supported by the operating frequency range of the equipment, this test shall be performed on two operating (hopping) frequencies randomly selected from the operating frequencies used by the equipment. The first (lower) frequency shall be randomly selected within the range 2 400 MHz to 2 442 MHz while the second (higher) frequency shall be randomly selected within the range 2 442 MHz to 2 483,5 MHz. The equipment shall be in a normal operating (hopping) mode.

For equipment which can operate in an adaptive and a non-adaptive mode, it shall be verified that prior to the test, the equipment is operating in the adaptive mode.

The equipment shall be configured in a mode that results in the longest Channel Occupancy Time.

Non-LBT based Detect and Avoid:

- 1 The channel shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel;
- 2 $COT \leq 40 \text{ ms}$;
- 3 Idle Period shall be minimum 5% of COT with a minimum of 100us;
- 4 Detection threshold level = $-70\text{dBm/MHz} + 10 \cdot \log(100\text{mW/Pout})$ (Pout in mW E.I.R.P)

LBT based Detect and Avoid (Frame Based Equipment):

- 1 The CCA observation time shall be not less than 18 us;
- 2 CCA observation time declared by the supplier;
- 3 $COT = 1 \sim 10 \text{ ms}$;
- 4 Idle Period $\geq 5\%$ of COT;
- 5 Detection threshold level = $-70\text{dBm/MHz} + 10 \cdot \log(100\text{mW/Pout})$ (Pout in mW E.I.R.P)


LBT based Detect and Avoid (Load Based Equipment):

- 1 The CCA observation time shall be not less than 18 us;
- 2 CCA declared by the manufacturer;
- 3 $COT \leq 13 \text{ ms}$;
- 4 Detection threshold level = $-70\text{dBm/MHz} + 10 \cdot \log(100\text{mW/Pout})$ (Pout in mW E.I.R.P)

Short Control Signalling Transmissions:

Short Control Signalling Transmissions shall have a maximum TxOn / (TxOn + TxOff) ratio of 10 % within any observation period of 50 ms or within an observation period equal to the dwell time, whichever is less.

5.2. Test Setup

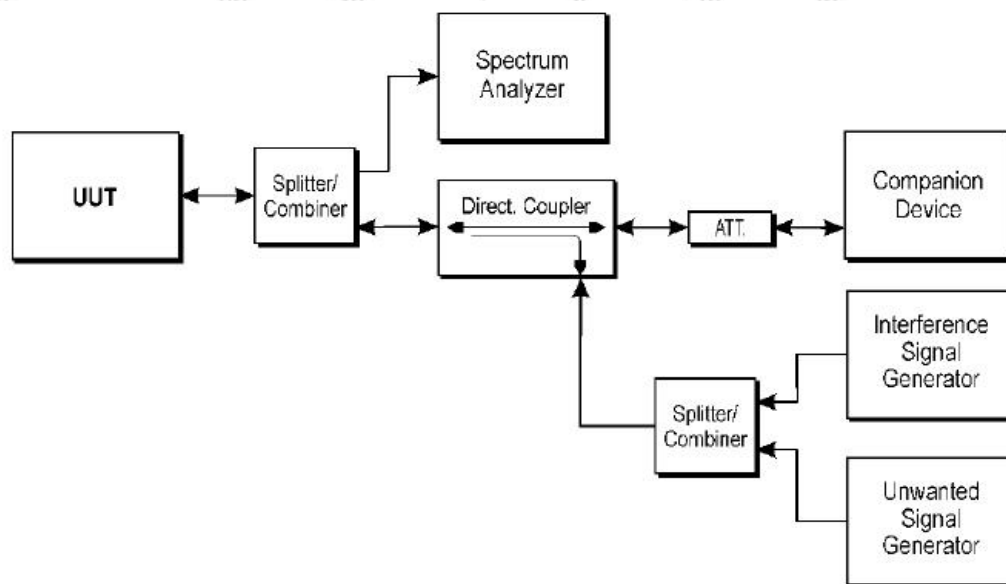




5.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2 Clause 5.4.6




5.4. Test Data




Pass



Test Mode	DUT Frequency (MHz)	AWGN Level (dBm)	Blocking Level (dBm)	Max. COT (ms)	Shot Control Width (ms)	Duty Cycle (%)	Conclusion
802.11b	2412	-64.02	-35	2.87	0	0	Pass
	2472	-64.02	-35	2.86	0	0	Pass
802.11g	2412	-63.96	-35	2.89	0	0	Pass
	2472	-63.96	-35	3.45	0	0	Pass
802.11n (HT20)	2412	-61.14	-35	1.93	0	0	Pass
	2472	-61.14	-35	3.10	0	0	Pass

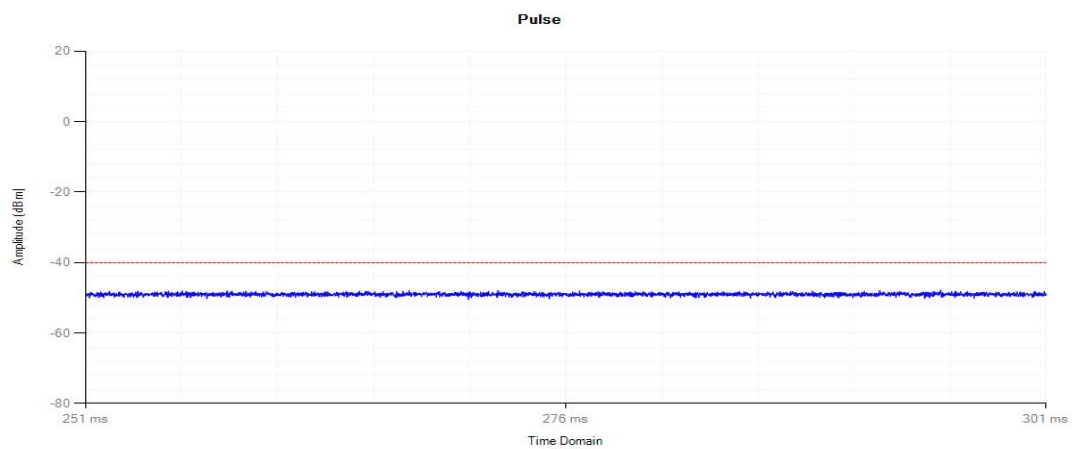
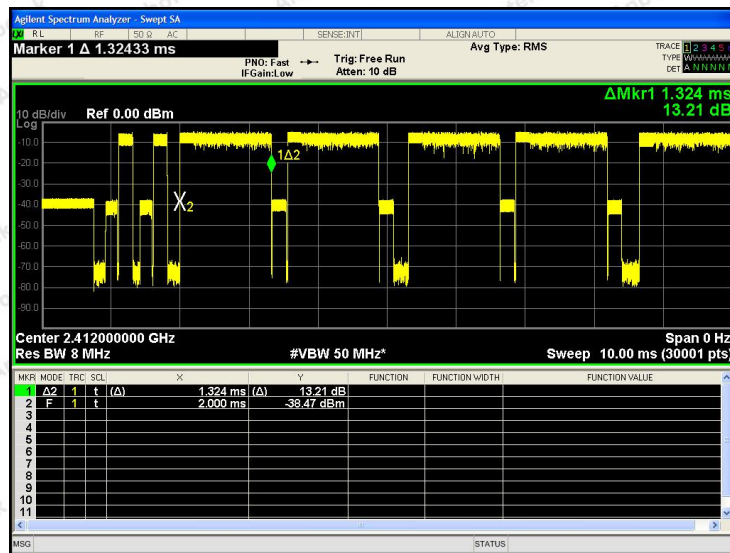
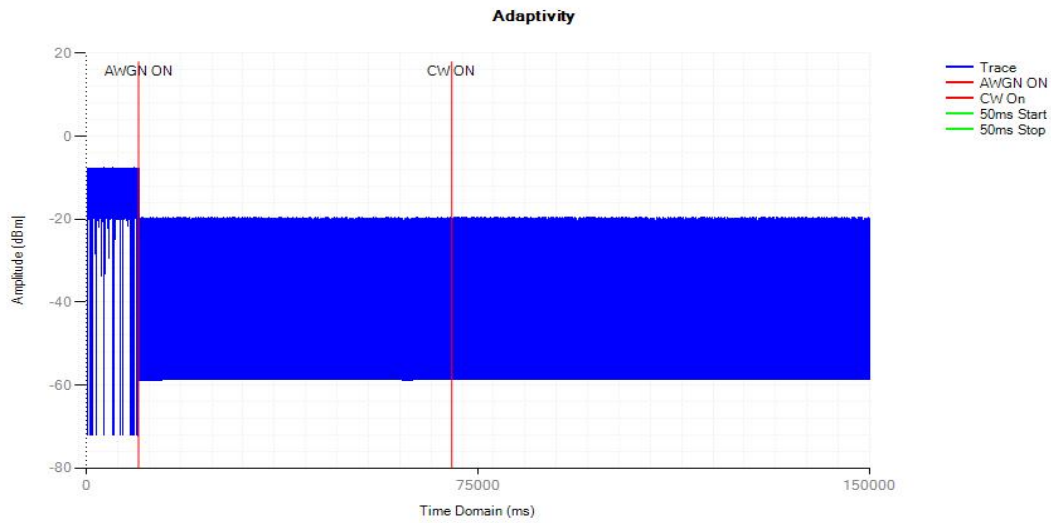





802.11b High

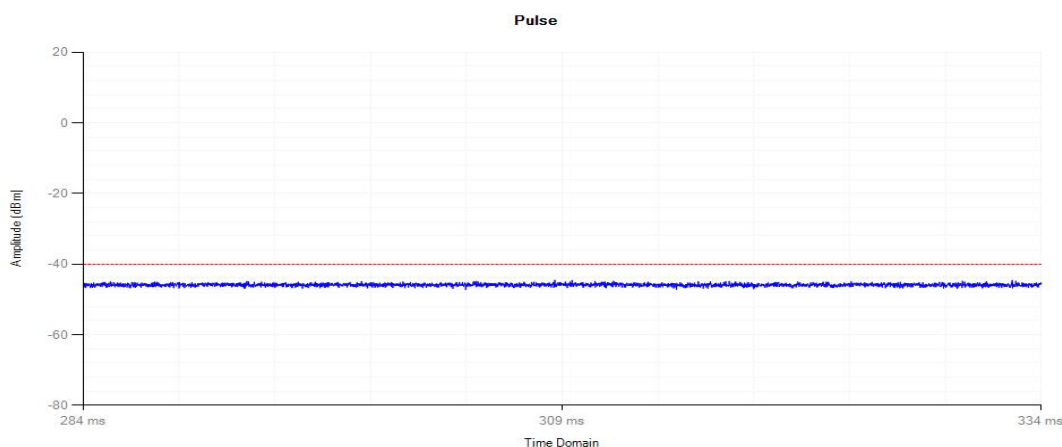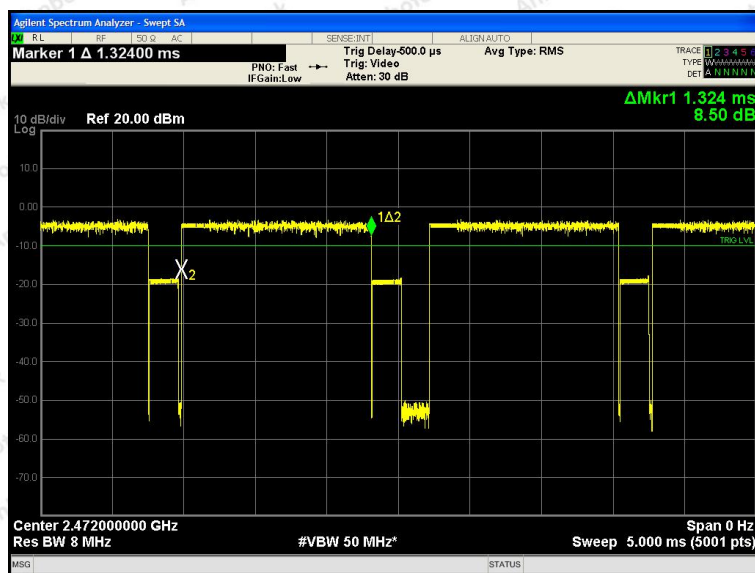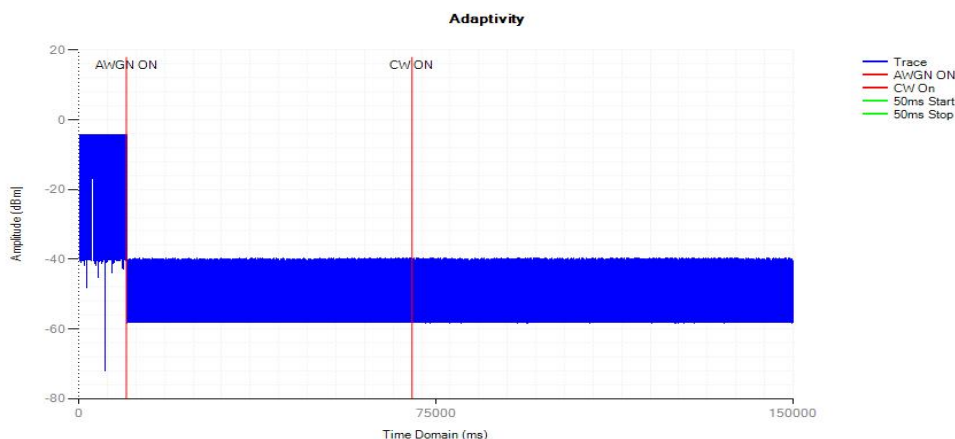

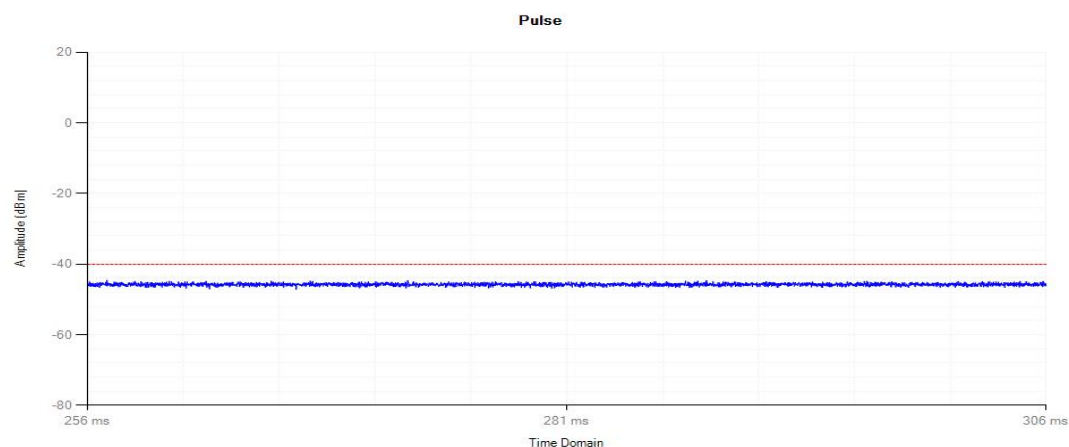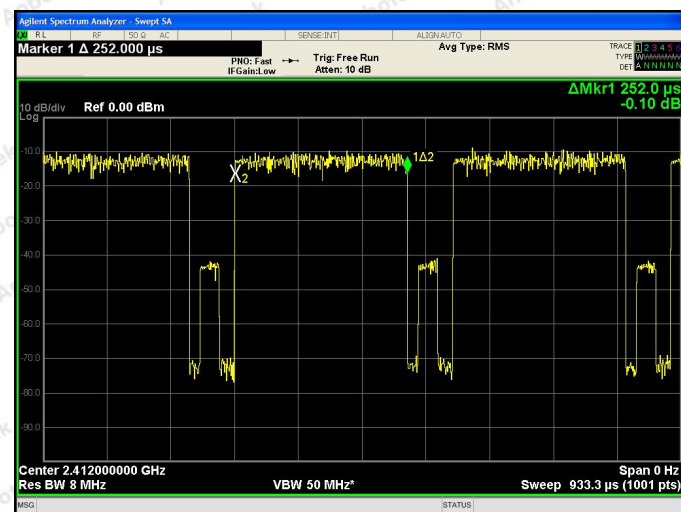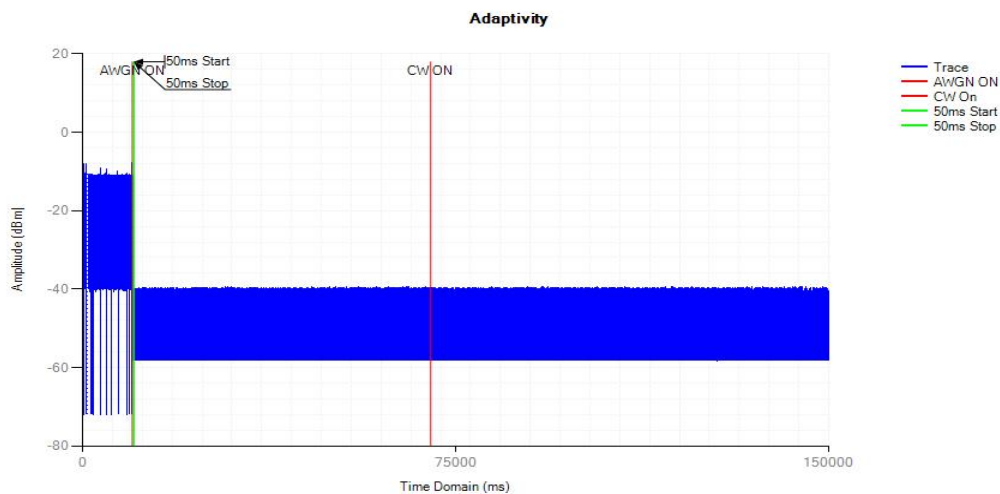

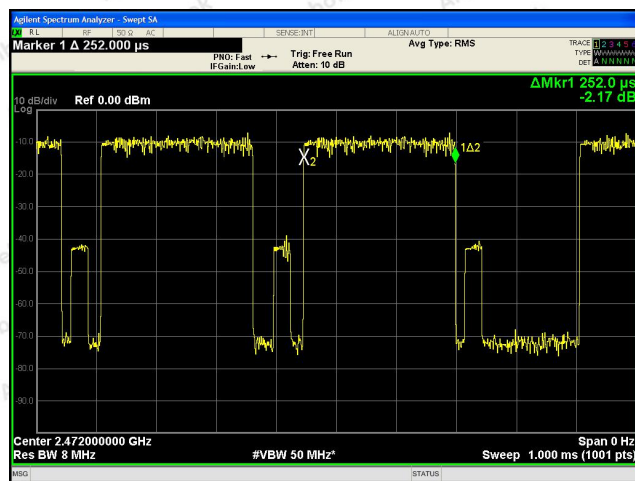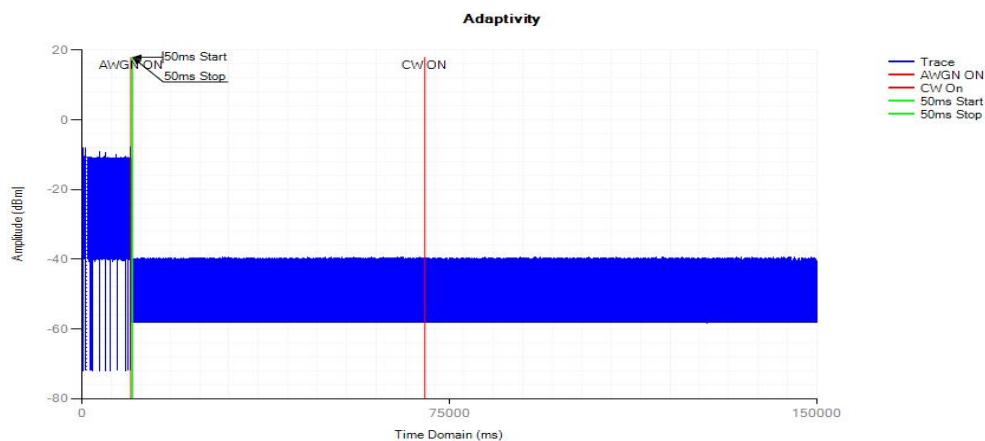

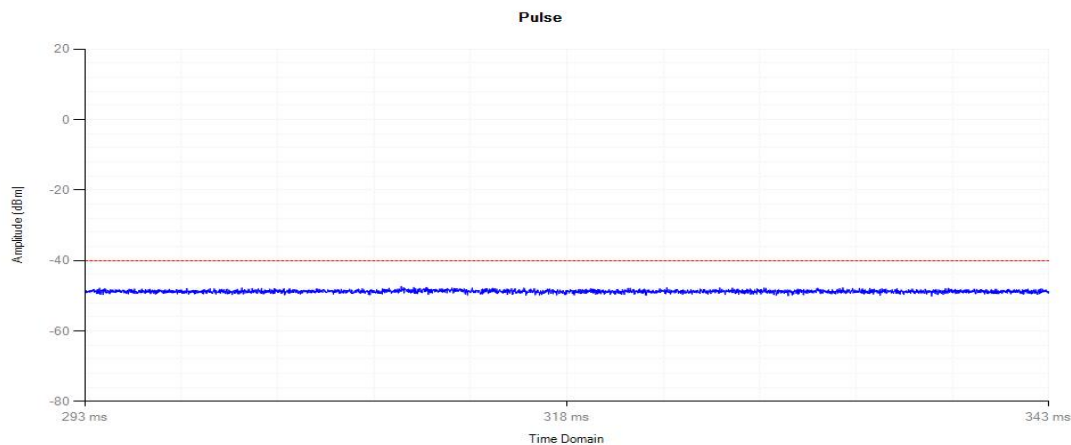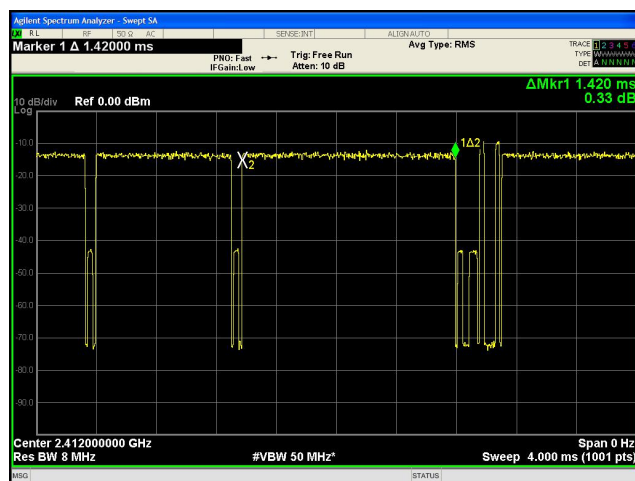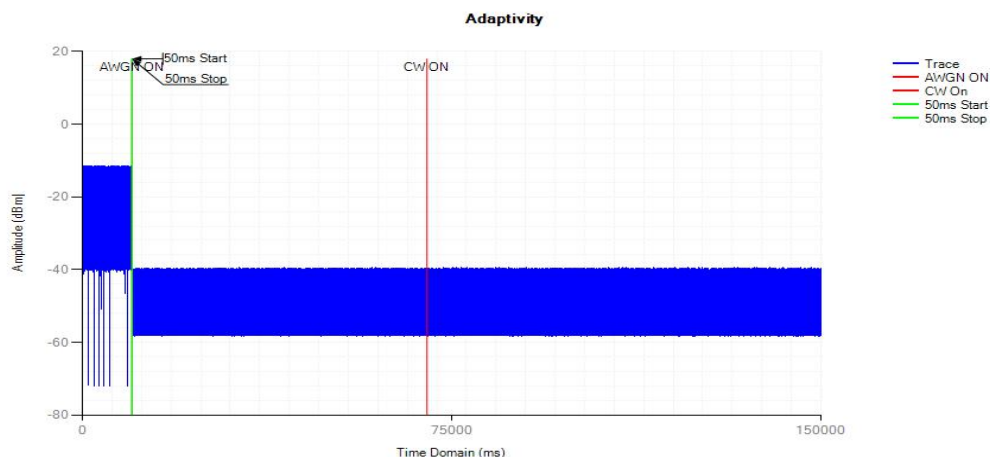

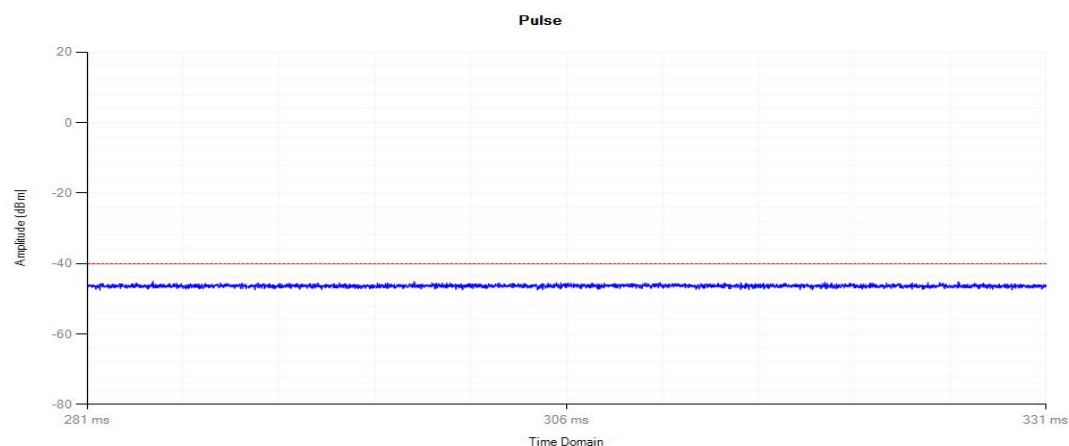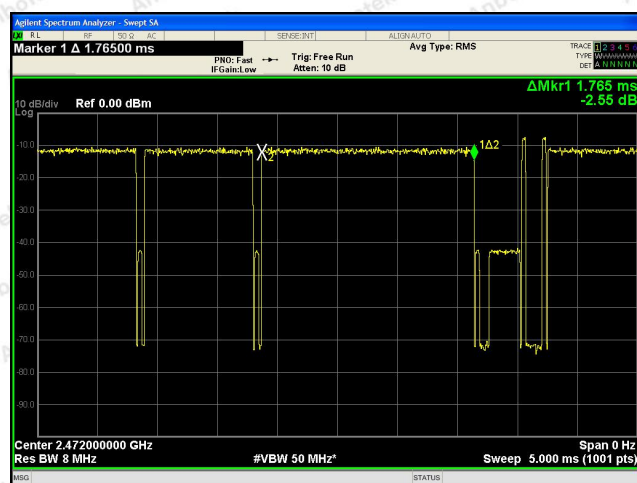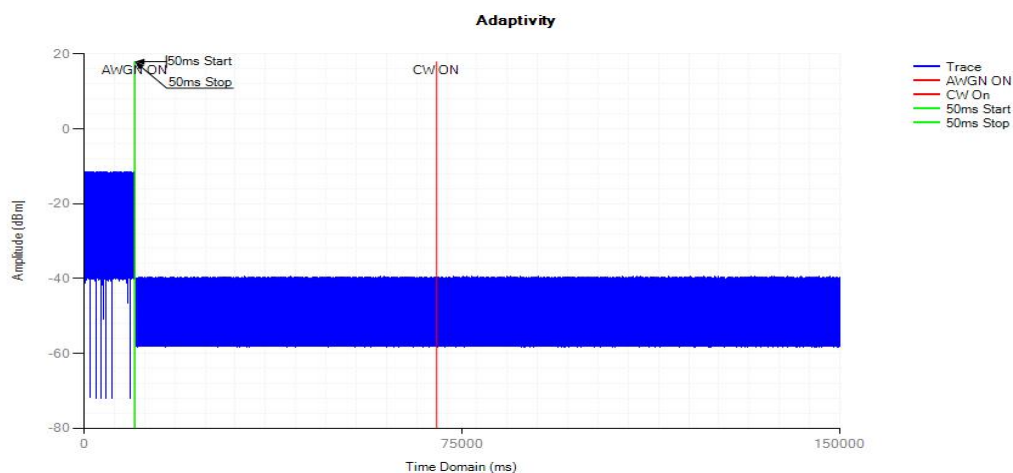


6. Occupied Channel Bandwidth

6.1. Test Limit

Condition		Limit
All types of equipment		Shall fall completely within the band 2400 to 2483.5 MHz.
Additional requirement	For non-adaptive using wide band modulations other than FHSS system and e.i.r.p >10dBm.	Less than 20MHz
	For non-adaptive Frequency Hopping system and e.i.r.p >10dBm.	Less than 5MHz

6.2. Test Setup

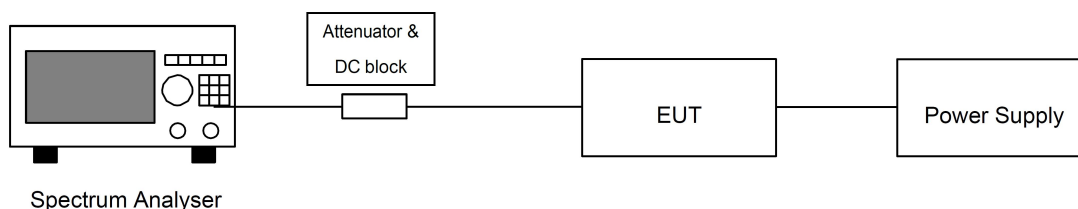

6.3. Test Procedure

Refer to ETSI EN 300 328 V2.2.2, clause 5.4.7 for the test conditions and the measurement method.

The setting of the Spectrum Analyzer

Center Frequency	The centre frequency of the channel under test
Frequency Span	2 × Nominal Channel Bandwidth (e.g. 40 MHz for a 20 MHz channel)
Detector	RMS
RBW	~ 1 % of the span without going below 1 % (200KHz for 20MHz channel, 430KHz for 40MHz)
VBW	3 × RBW (620KHz for 20MHz channel, 1200KHz for 40MHz)
Trace	Max hold
Sweep time	1S

6.4. Test Data

Pass


Please refer to Appendix C of the Appendix Test Data.

7. Transmitter Unwanted Emissions in the out-of-band Domain


7.1. Test Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure as below.

Note: Within the 2400MHz to 2483.5MHz band, the Out-of band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.2.6.

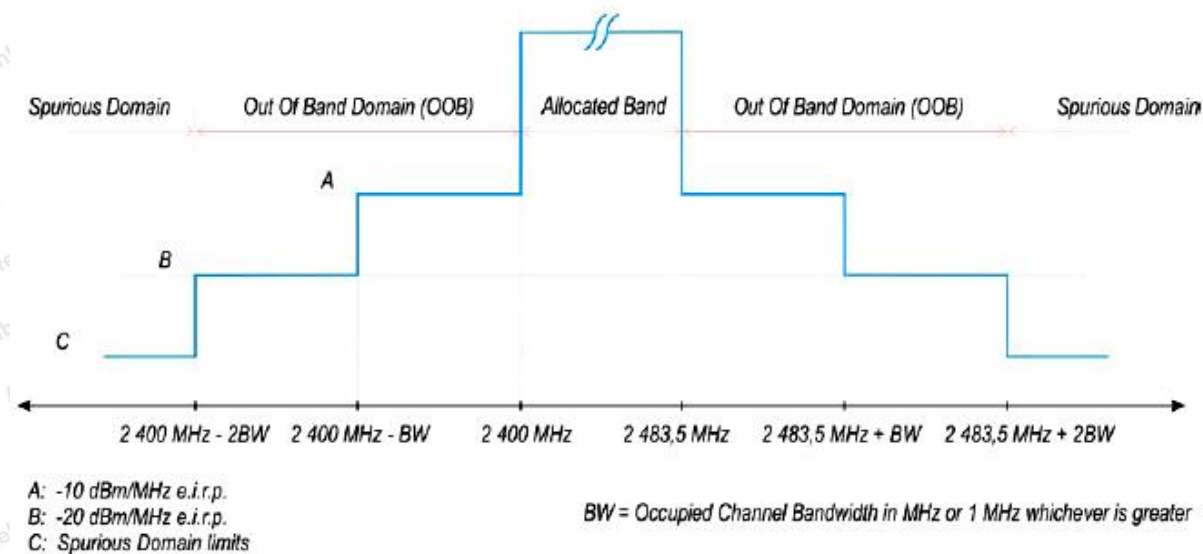

7.2. Test Setup

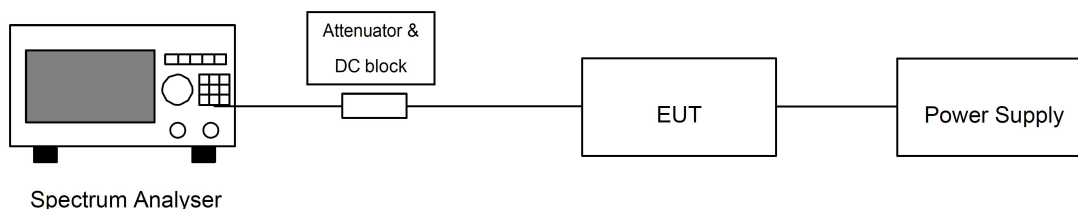

7.3. Test Procedure

Refer as ETSI EN 300 328 V2.2.2, clause 5.4.8 for the test conditions and the measurement method.

The setting of the Spectrum Analyzer

RBW/ VBW	1MHz/3MHz
Span	0Hz
Filter mode	Channel filter
Sweep mode	Continuous
Sweep Points	Sweep Time[s]/(1us) or 5000 points, whichever is greater
Detector	RMS
Trace mode	Max Hold
Trigger Mode	Video trigger

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.

8. Transmitter Unwanted Emissions in the Spurious Domain

8.1. Test Limit


Frequency Range	Maximum Power	Bandwidth
30 MHz to 47 MHz	-36dBm	100kHz
47 MHz to 74 MHz	-54dBm	100kHz
74 MHz to 87,5 MHz	-36dBm	100kHz
87,5 MHz to 118 MHz	-54dBm	100kHz
118 MHz to 174 MHz	-36dBm	100kHz
174 MHz to 230 MHz	-54dBm	100kHz
230 MHz to 470 MHz	-36dBm	100kHz
470 MHz to 694 MHz	-54dBm	100kHz
694 MHz to 1 GHz	-36dBm	100kHz
1 GHz to 12,75 GHz	-30dBm	1MHz

8.2. Test Setup

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz.

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

GHz

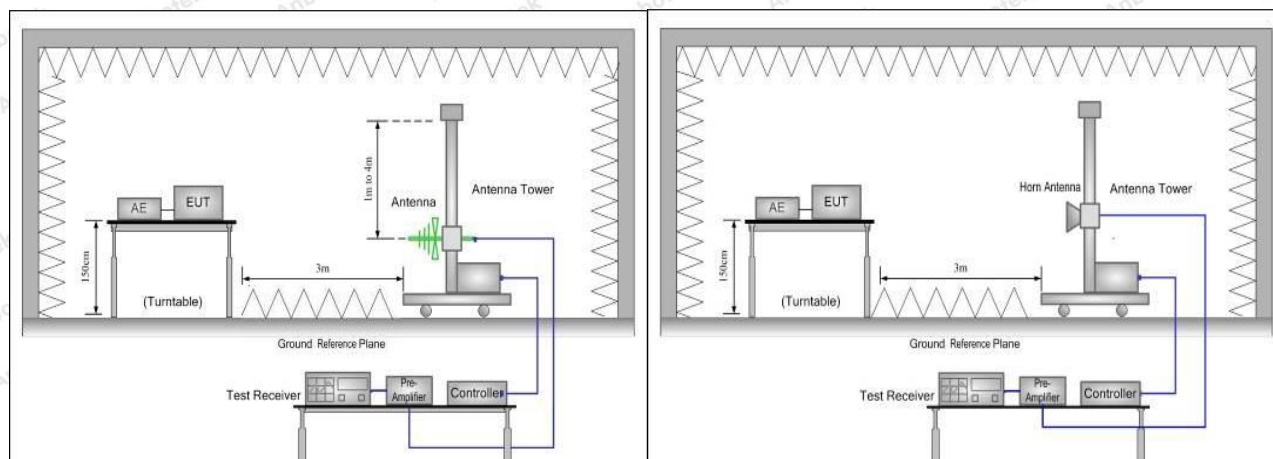

8.3. Test Procedure

Refer to chapter 5.4.9.2.2 of ETSI EN 300 328 V2.2.2 for radiated measurement.

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
3. The equipment was configured to operate under its worst case situation with respect to output power.
4. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

8.4. Test Data

Temperature:	23.6° C	Relative Humidity:	56 %
Pressure:	1012 hPa	Test Voltage:	DC 50.4V Battery inside

Worst case: 802.11b**Test Result: 30-1000MHz**

Test Mode: TX Mode			Test Channel: 802.11b		
Frequency (MHz)	Level(dBm)	Limit (dBm)	Margin(dB)	Polarization	Test Result
52.96	-66.04	-54.00	-12.04	H	PASS
126.01	-68.05	-36.00	-32.05	H	
449.38	-66.74	-36.00	-30.74	H	
578.30	-68.52	-54.00	-14.52	H	
747.50	-74.83	-54.00	-20.83	H	
918.26	-67.30	-36.00	-31.30	H	
53.24	-74.33	-54.00	-20.33	V	
164.87	-68.88	-36.00	-32.88	V	
322.71	-71.38	-36.00	-35.38	V	
579.02	-73.70	-54.00	-19.70	V	
730.43	-70.53	-54.00	-16.53	V	
958.69	-74.19	-36.00	-38.19	V	

Test Result: above 1000MHz

Test Mode: TX Mode			Test Channel: 802.11b CH01		
Frequency (MHz)	Level(dBm)	Limit (dBm)	Margin(dB)	Polarization	Test Result
4824.00	-47.81	-30.00	-17.81	H	PASS
7236.00	-45.75	-30.00	-15.75	H	
9648.00	-44.97	-30.00	-14.97	H	
4824.00	-48.01	-30.00	-18.01	V	
7236.00	-45.66	-30.00	-15.66	V	
9648.00	-43.85	-30.00	-13.85	V	

Test Mode: TX Mode			Test Channel: 802.11b CH13		
Frequency (MHz)	Level(dBm)	Limit (dBm)	Margin(dB)	Polarization	Test Result
4944.00	-45.69	-30.00	-15.69	H	PASS
7416.00	-44.59	-30.00	-14.59	H	
9888.00	-43.65	-30.00	-13.65	H	
4944.00	-45.65	-30.00	-15.65	V	
7416.00	-52.51	-30.00	-22.51	V	
9888.00	-42.89	-30.00	-12.89	V	

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

9. Receiver Spurious Emissions

9.1. Test Limit

The spurious emissions of the receiver shall not exceed the values given in table.


Frequency Range	Maximum Power
30MHz ~ 1GHz	-57dBm
1GHz ~ 12.75GHz	-47dBm

9.2. Test Setup

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz.

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

GHz

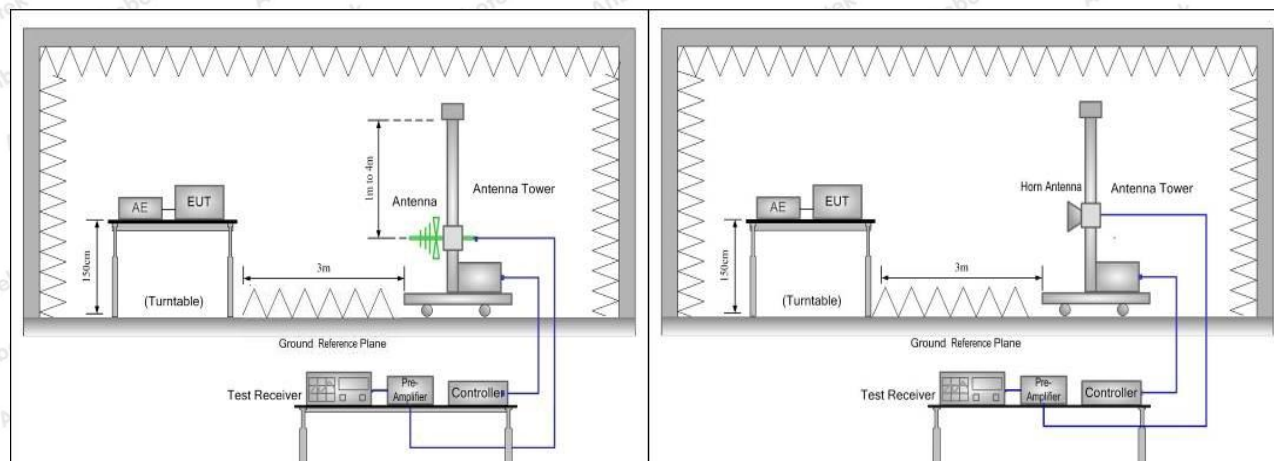

9.3. Test Procedure

Refer as ETSI EN 300 328 V2.2.2, Refer to chapter 5.4.10.2.2 for radiated measurement.

1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. Testing was performed when the equipment was in a receive-only mode.
3. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
4. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

9.4. Test Data

Remark: Pre-scan all modes and recorded the worst case results in this report.

Temperature:	23.6° C	Relative Humidity:	56 %
Pressure:	1012 hPa	Test Voltage:	DC 50.4V Battery inside

worst case: 802.11b

Test Result: 30-1000MHz

Test Mode: RX Mode			Test Channel: 802.11 b		
Frequency (MHz)	Level(dBm)	Limit (dBm)	Margin(dB)	Polarization	Test Result
48.41	-66.48	-57.00	-9.48	H	PASS
104.31	-65.82	-57.00	-8.82	H	
115.29	-69.19	-57.00	-12.19	H	
217.01	-70.84	-57.00	-13.84	H	
368.44	-68.05	-57.00	-11.05	H	
475.75	-64.95	-57.00	-7.95	H	
60.78	-67.80	-57.00	-10.80	V	
89.63	-65.32	-57.00	-8.32	V	
130.44	-69.78	-57.00	-12.78	V	
185.74	-67.16	-57.00	-10.16	V	
454.64	-69.66	-57.00	-12.66	V	
561.23	-66.26	-57.00	-9.26	V	

Test Result: above 1000MHz

Test Mode: RX Mode			Test Channel: 802.11b CH01		
Frequency (MHz)	Level(dBm)	Limit (dBm)	Margin(dB)	Polarization	Test Result
4824.00	-63.92	-47.00	-16.92	H	PASS
7236.00	-64.49	-47.00	-17.49	H	
9648.00	-67.29	-47.00	-20.29	H	
4824.00	-68.26	-47.00	-21.26	V	
7236.00	-64.89	-47.00	-17.89	V	
9648.00	-67.88	-47.00	-20.88	V	

Test Mode: RX Mode			Test Channel: 802.11b CH13		
Frequency (MHz)	Level(dBm)	Limit (dBm)	Margin(dB)	Polarization	Test Result
4944.00	-69.38	-47.00	-22.38	H	PASS
7416.00	-65.68	-47.00	-18.68	H	
9888.00	-64.34	-47.00	-17.34	H	
4944.00	-64.06	-47.00	-17.06	V	
7416.00	-71.19	-47.00	-24.19	V	
9888.00	-67.19	-47.00	-20.19	V	

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline
400-003-0500
www.anbotech.com

10. Receiver Blocking

10.1. Test Limit

This requirement applies to all receiver categories.

RECEIVER CATEGORY		
Category 1 <input checked="" type="checkbox"/>	Category 2 <input type="checkbox"/>	Category 3 <input type="checkbox"/>
Minimum performance criterion	PER $\leq 10\%$	
	Alternative performance criteria	

Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 26 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 20 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			


Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

10.2. Test Setup

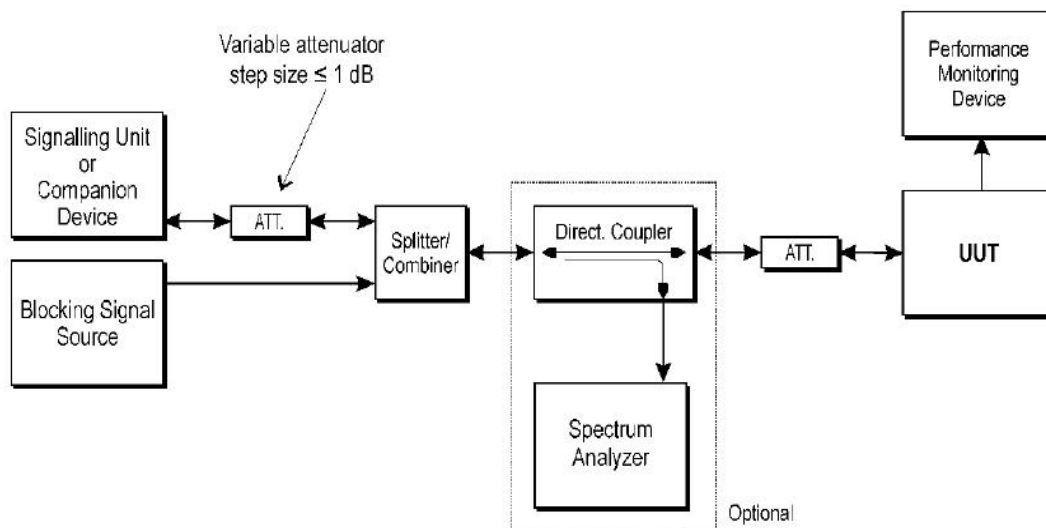

10.3. Test Procedure

Refer to chapter 5.4.11.2.1 of ETSI EN 300 328 V2.2.2

10.4. Minimum Performance Declaration

	CH	Pmin (dBm)	PER (≤ 10%)
802.11b	01	-91	Pass
	13	-91	Pass
802.11g	01	-91	Pass
	13	-91	Pass
802.11n(HT20)	01	-91	Pass
	13	-91	Pass

Note: Pmin is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria.

10.5. Test Data

Temperature:	24.6° C	Relative Humidity:	52 %
Pressure:	1012 hPa	Test Voltage:	DC 50.4V Battery inside

802.11b: CH01

Wanted Signal Mean Power from Companion Device (dBm/MHz)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Type of Blocking Signal	PER(%)	Pass / Fail
-68	2380	-34	CW	1.48	PASS
	2504			1.09	PASS
-74	2300	-34	CW	1.54	PASS
	2330			1.77	PASS
	2360			2.06	PASS
	2524			2.18	PASS
	2584			2.65	PASS
	2627			1.32	PASS

802.11b: CH13

Wanted Signal Mean Power from Companion Device (dBm/MHz)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Type of Blocking Signal	PER(%)	Pass / Fail
-68	2380	-34	CW	1.00	PASS
	2504			1.76	PASS
-74	2300	-34	CW	1.61	PASS
	2330			2.25	PASS
	2360			1.91	PASS
	2524			1.84	PASS
	2584			1.34	PASS
	2627			1.24	PASS

802.11g: CH01

Wanted Signal Mean Power from Companion Device (dBm/MHz)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Type of Blocking Signal	PER(%)	Pass / Fail
-68	2380	-34	CW	1.86	PASS
	2504			1.13	PASS
-74	2300	-34	CW	2.31	PASS
	2330			1.51	PASS
	2360			2.45	PASS
	2524			2.47	PASS
	2584			1.93	PASS
	2627			1.29	PASS

802.11g: CH13

Wanted Signal Mean Power from Companion Device (dBm/MHz)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Type of Blocking Signal	PER(%)	Pass / Fail
-68	2380	-34	CW	1.09	PASS
	2504			1.24	PASS
-74	2300	-34	CW	2.41	PASS
	2330			1.57	PASS
	2360			2.24	PASS
	2524			1.87	PASS
	2584			3.11	PASS
	2627			1.09	PASS

Wanted Signal Mean Power from Companion Device (dBm/MHz)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Type of Blocking Signal	PER(%)	Pass / Fail
-68	2380	-34	CW	1.50	PASS
	2504			1.91	PASS
-74	2300	-34	CW	1.65	PASS
	2330			1.86	PASS
	2360			1.64	PASS
	2524			2.19	PASS
	2584			1.46	PASS
	2627			1.51	PASS

Wanted Signal Mean Power from Companion Device (dBm/MHz)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	Type of Blocking Signal	PER(%)	Pass / Fail
-68	2380	-34	CW	1.72	PASS
	2504			1.88	PASS
-74	2300	-34	CW	1.43	PASS
	2330			1.25	PASS
	2360			1.26	PASS
	2524			1.78	PASS
	2584			2.43	PASS
	2627			2.56	PASS

Note: Antenna Gain(Peak) is 2.07 dBi, so the above table is given with the calculated levels.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test



APPENDIX II -- Appendix Test Data